
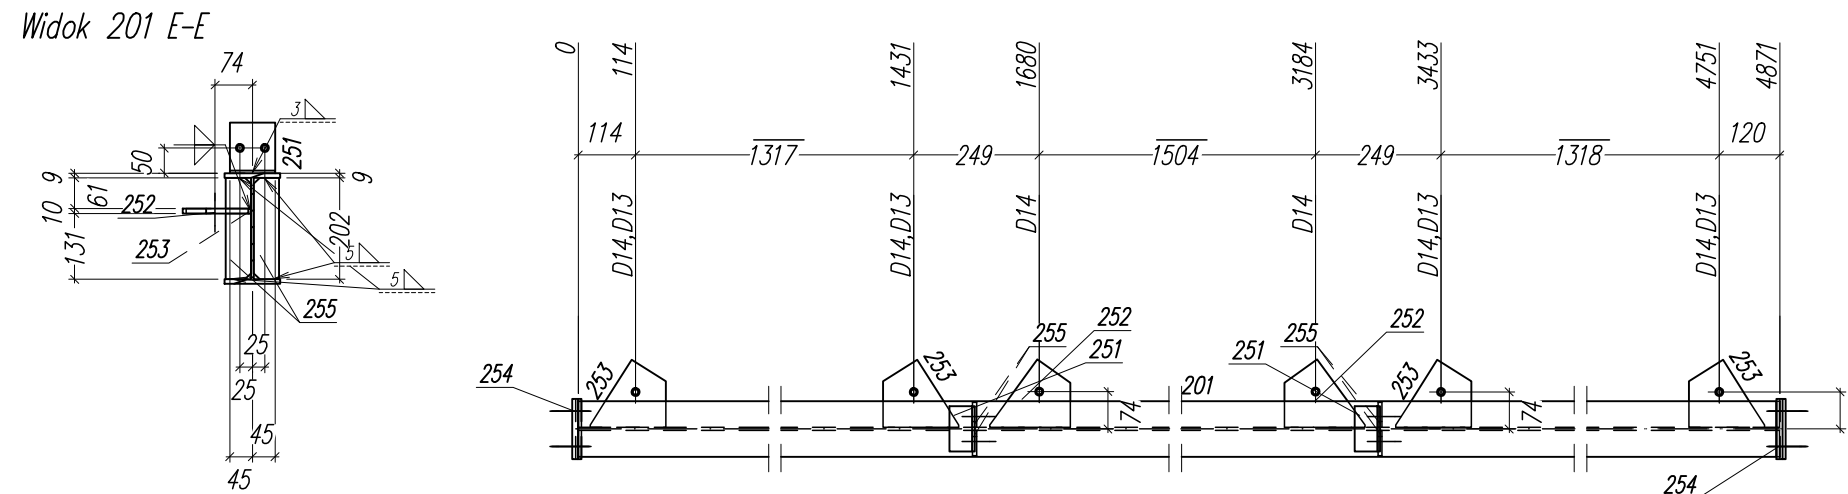


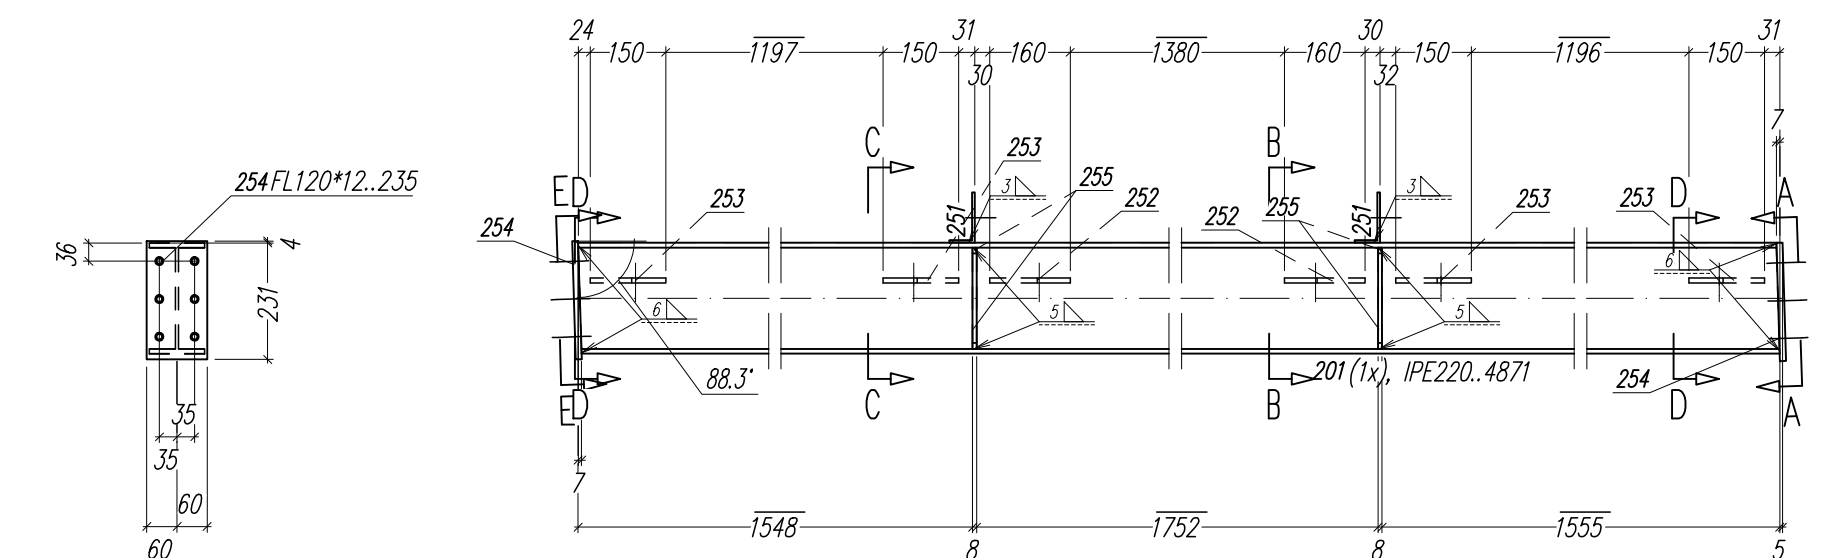



Przekrój 201 B-B

**** Zest. dla jednego et. wysyłkowego-**

Nr.	Tr.	Poz.	Nazwa	Szulk	Profil	Materiał	Długość	Waga	Ozn.
1	2	201	Odwier	1	PE220	S235JR	4871	127.61	
2	2	251	Kotłownik	2	BL100*50*5	S235JR	90	1.02	
3	2	252	BLACHA	2	PL10*135	S235JR	160	3.40	
4	2	253	BLACHA	4	PL10*134	S235JR	150	6.32	
5	2	254	BLACHA	4	PL120*12	S235JR	235	5.31	
6	2	255	BLACHA	4	PL8*50	S235JR	202	2.53	

Waga całkowita (kg) 146.20

Gabaryty (W x S x D): 335 x 198 x 4895

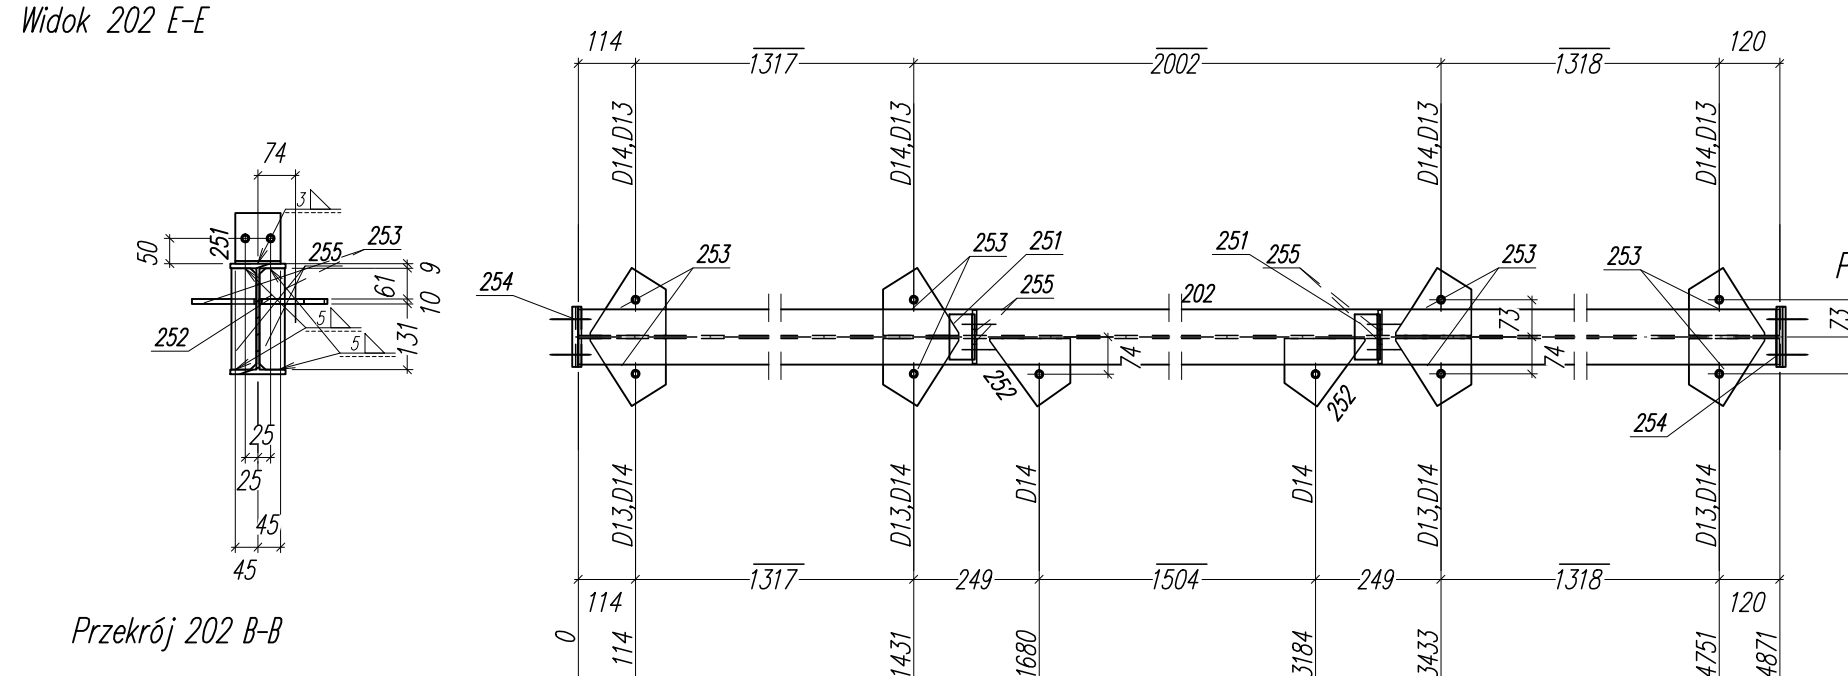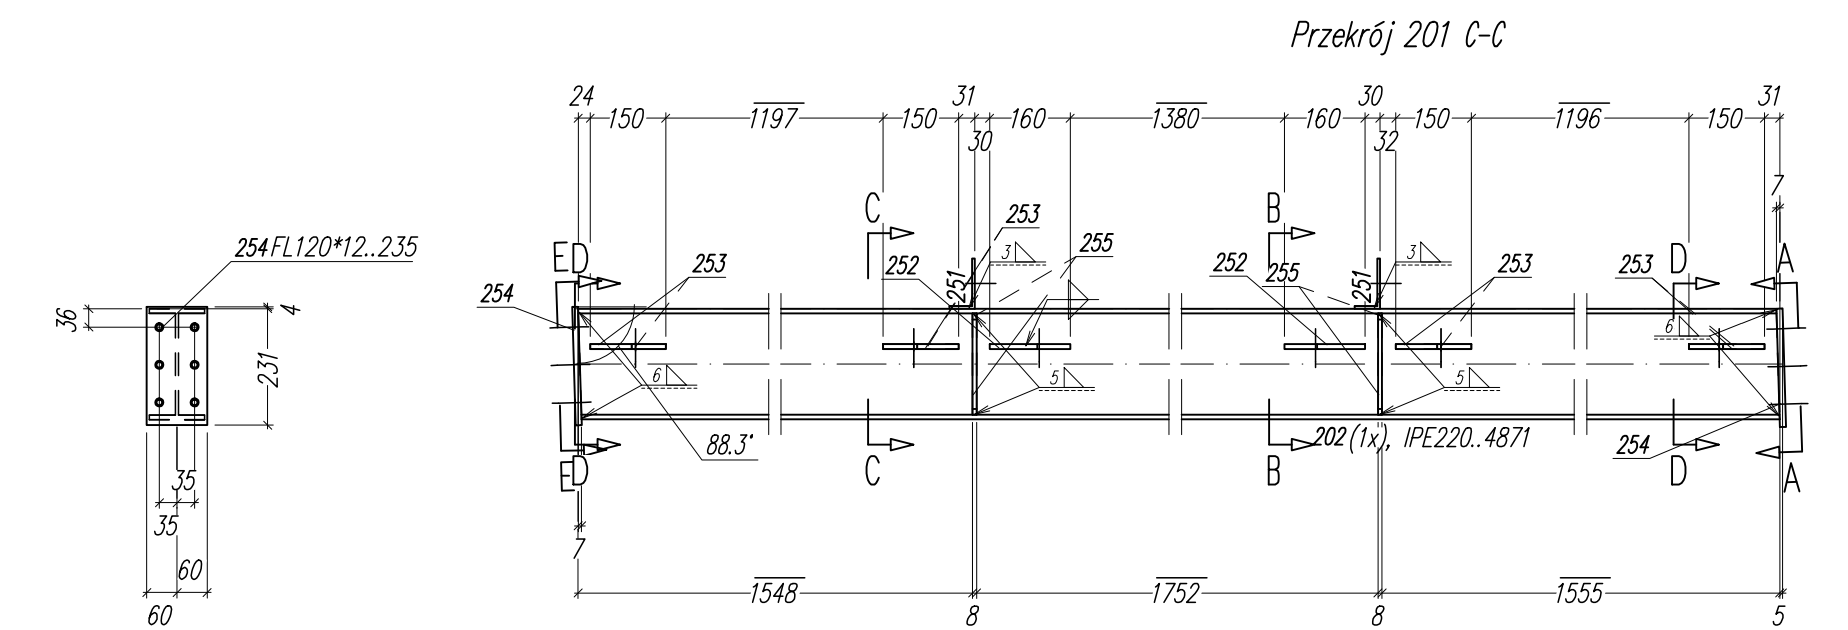


Przekrój 202 B-B

**** Zest. dla jednego et. wysyłkowego-**

Nr.	Tr.	Poz.	Nazwa	Szulk	Profil	Materiał	Długość	Waga	Ozn.
1	2	202	Odwier	1	PE220	S235JR	4871	127.61	
2	2	251	Kotłownik	2	BL100*50*5	S235JR	90	1.02	
3	2	252	BLACHA	2	PL10*135	S235JR	160	3.40	
4	2	253	BLACHA	4	PL10*134	S235JR	150	12.64	
5	2	254	BLACHA	2	FL10*12	S235JR	235	5.31	
6	2	255	BLACHA	4	PL8*50	S235JR	202	2.53	

Waga całkowita (kg) 152.52

Gabaryty (W x S x D): 335 x 275 x 4895


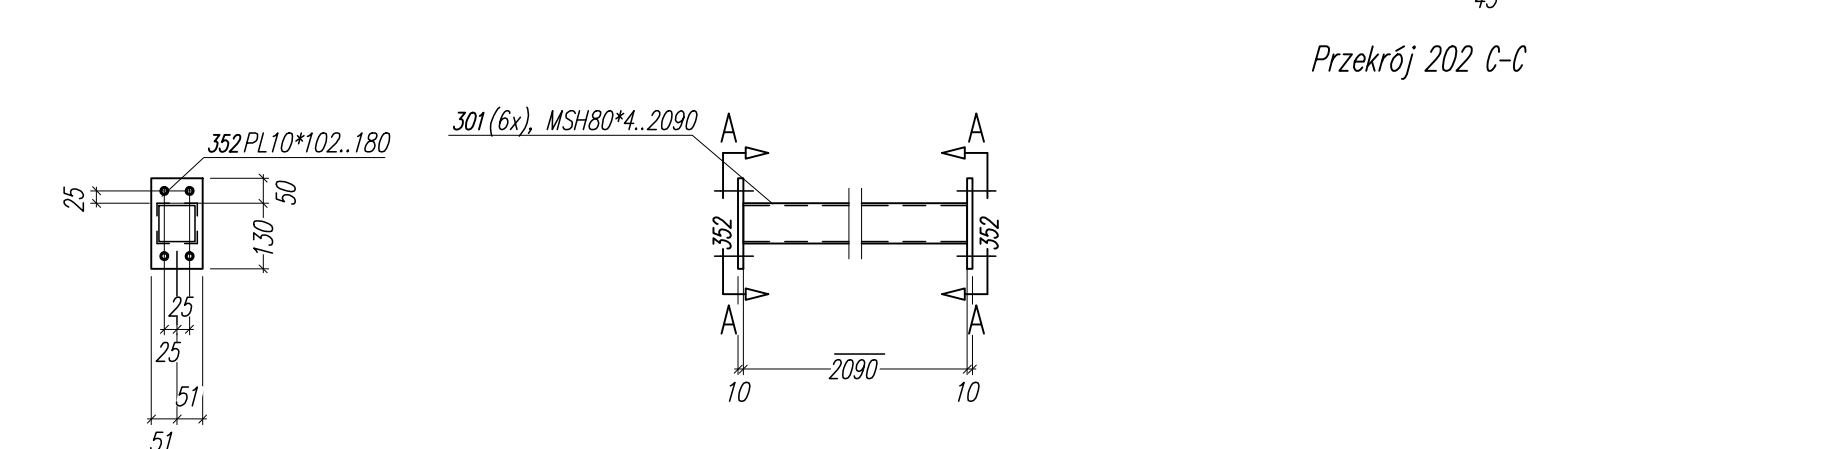


**** Zest. dla jednego et. wysyłkowego-**

Nr.	Tr.	Poz.	Nazwa	Szulk	Profil	Materiał	Długość	Waga	Ozn.
1	3	301	Ispak	1	UPH100	S235JR	2000	19.72	
2	3	352	BLACHA	2	PL10*102	S235JR	180	2.88	

Waga całkowita (kg) 22.61

Gabaryty (W x S x D): 180 x 102 x 2110

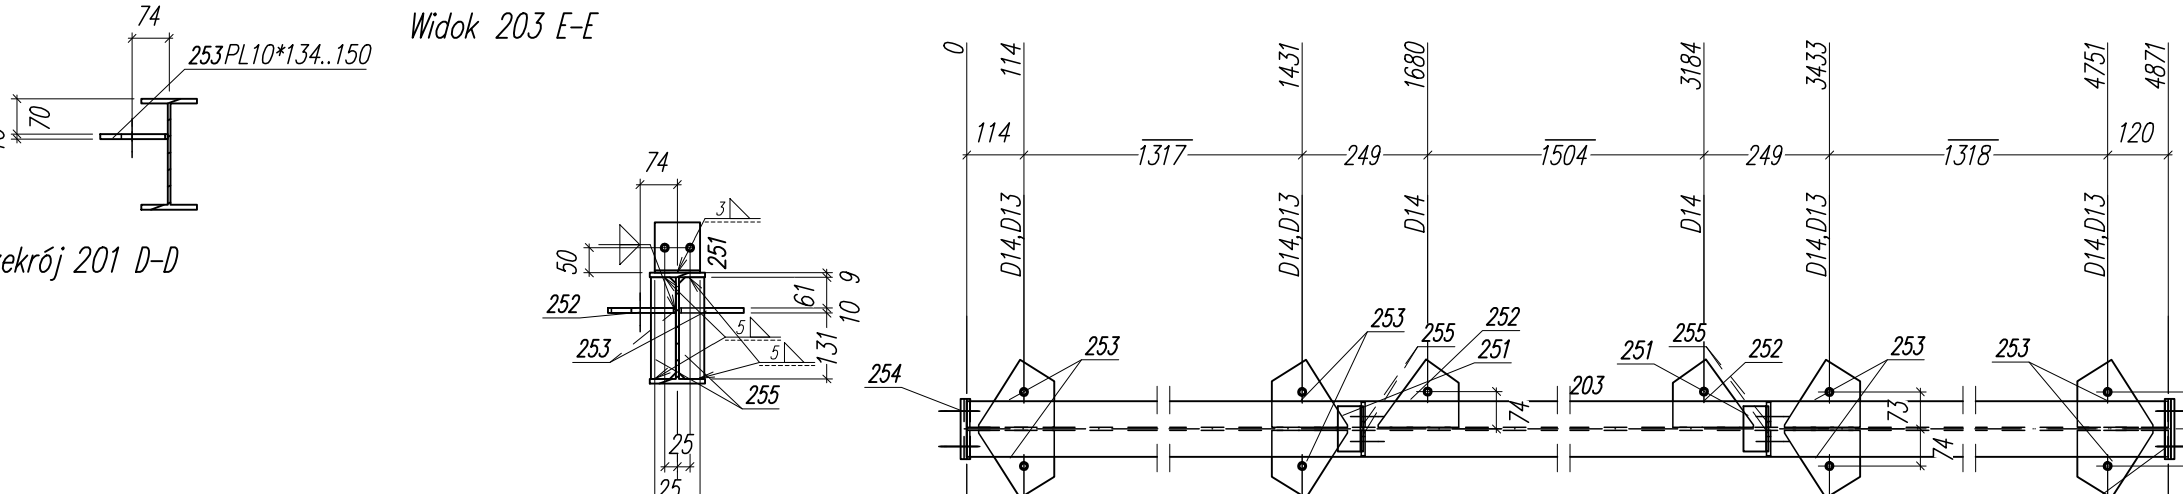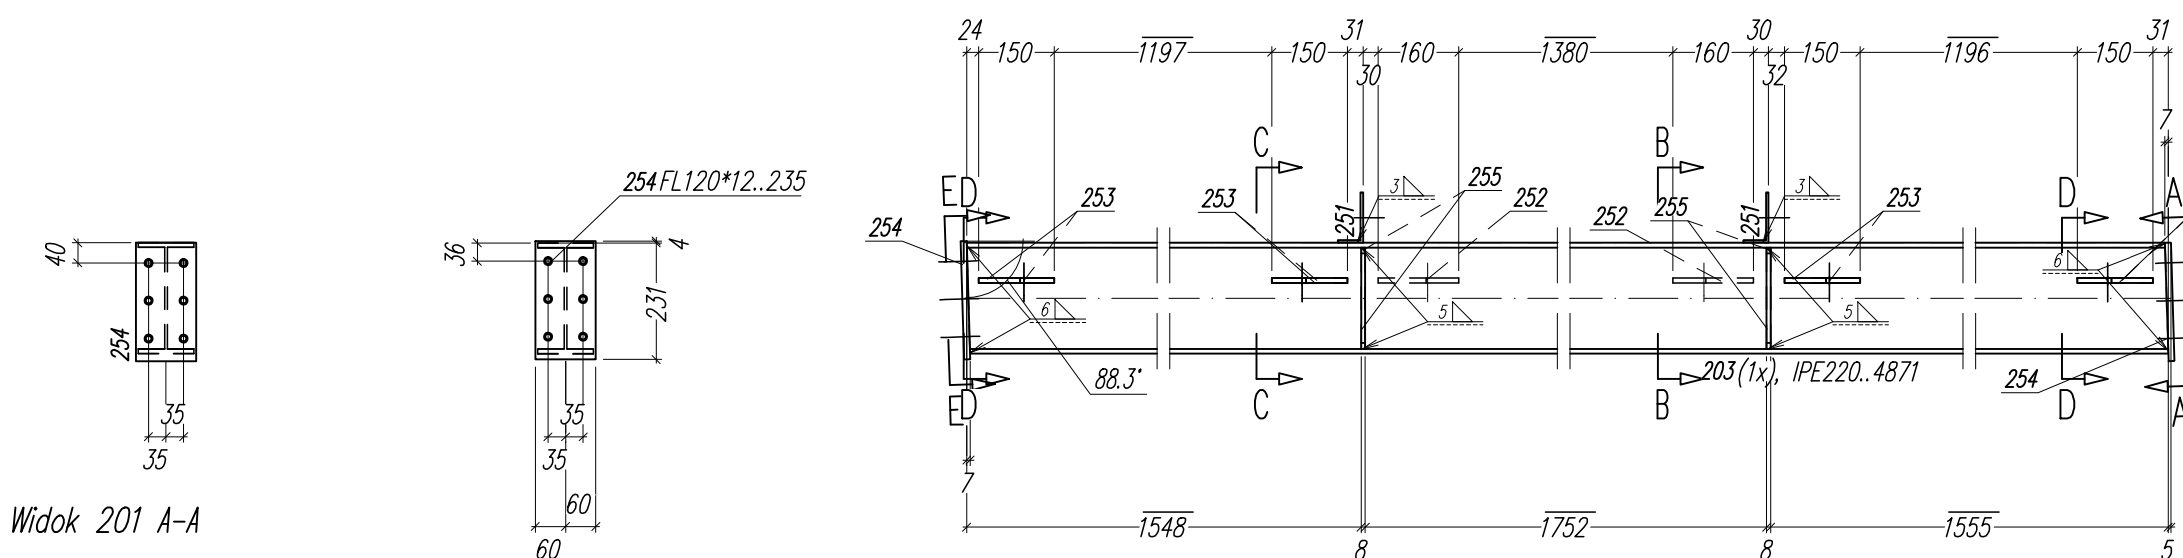



Przekrój 203 B-B

**** Zest. dla jednego et. wysyłkowego-**

Nr.	Tr.	Poz.	Nazwa	Szulk	Profil	Materiał	Długość	Waga	Ozn.
1	2	203	Odwier	1	PE220	S235JR	4871	127.61	
2	2	251	Kotłownik	2	BL100*50*5	S235JR	90	1.02	
3	2	252	BLACHA	2	PL10*135	S235JR	160	3.40	
4	2	253	BLACHA	8	PL10*134	S235JR	150	12.64	
5	2	254	BLACHA	2	FL10*12	S235JR	235	5.31	
6	2	255	BLACHA	4	PL8*50	S235JR	202	2.53	

Waga całkowita (kg) 152.52

Gabaryty (W x S x D): 335 x 275 x 4895

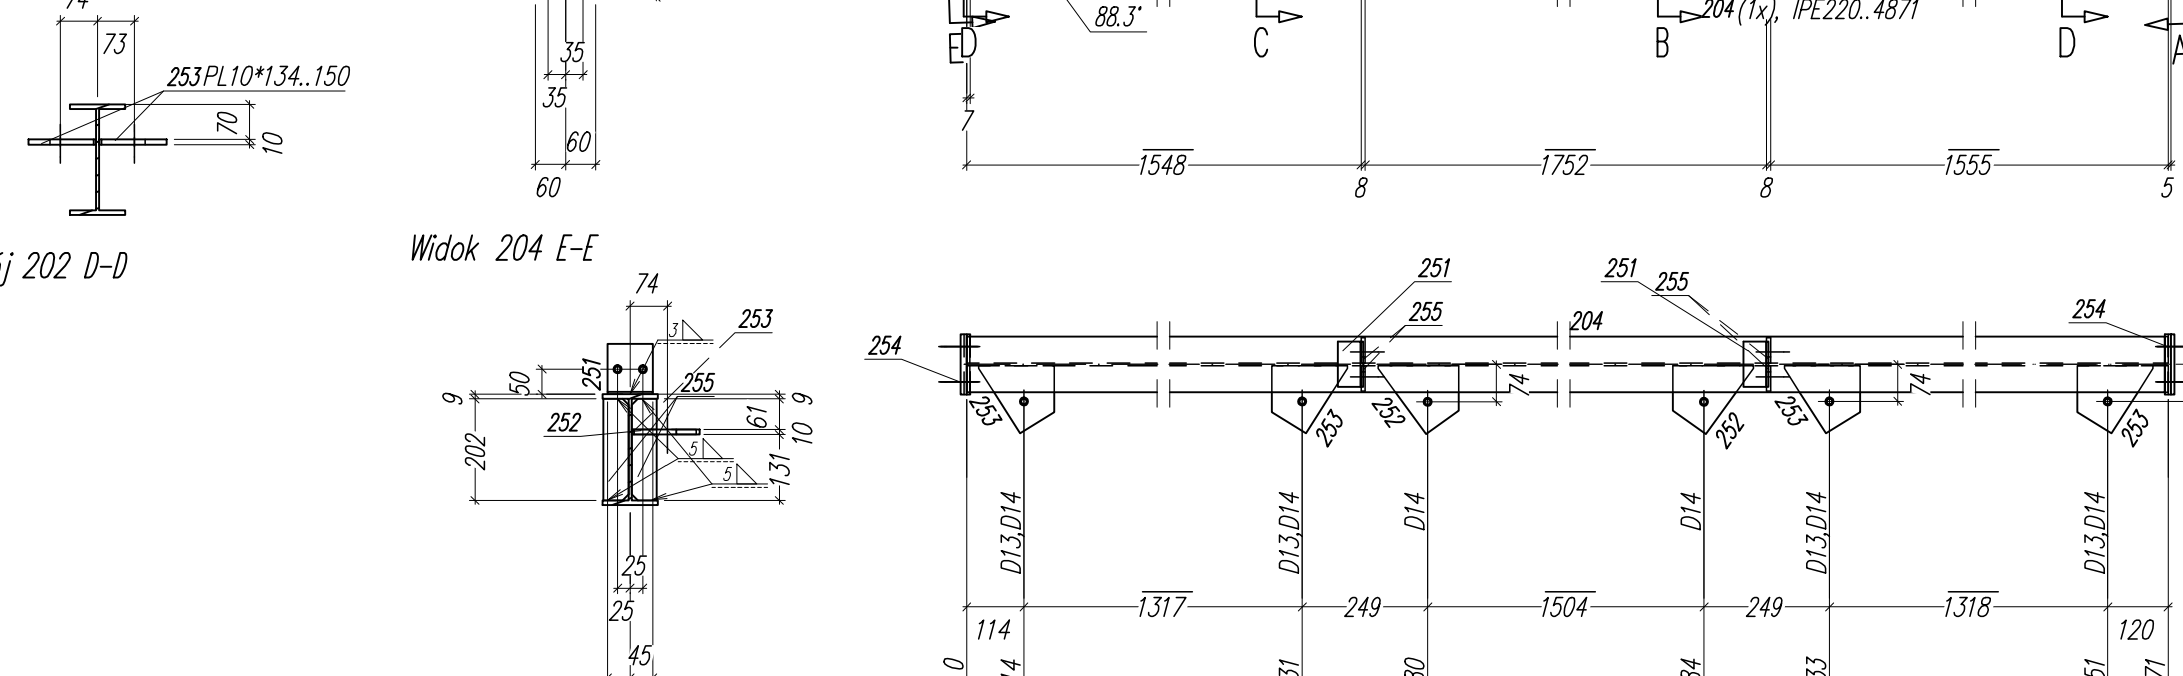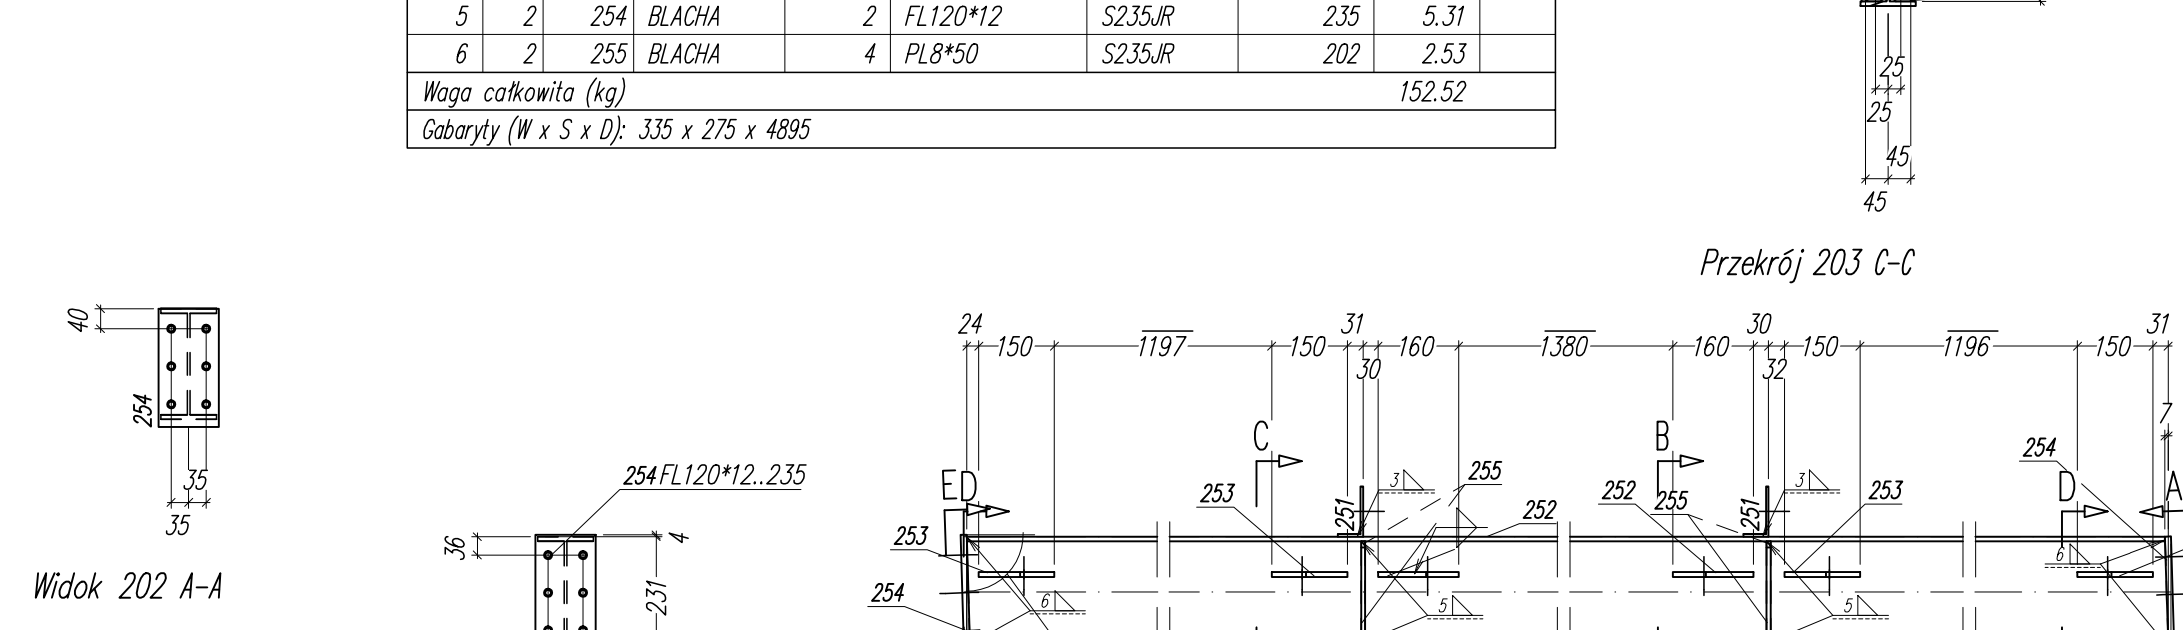



Przekrój 204 B-B

**** Zest. dla jednego et. wysyłkowego-**

Nr.	Tr.	Poz.	Nazwa	Szulk	Profil	Materiał	Długość	Waga	Ozn.
1	2	204	Odwier	1	PE220	S235JR	4871	127.61	
2	2	251	Kotłownik	2	BL100*50*5	S235JR	90	1.02	
3	2	252	BLACHA	2	PL10*135	S235JR	160	3.40	
4	2	253	BLACHA	4	PL10*134	S235JR	150	6.32	
5	2	254	BLACHA	2	FL120*12	S235JR	235	5.31	
6	2	255	BLACHA	4	PL8*50	S235JR	202	2.53	

Waga całkowita (kg) 146.20

Gabaryty (W x S x D): 335 x 198 x 4895

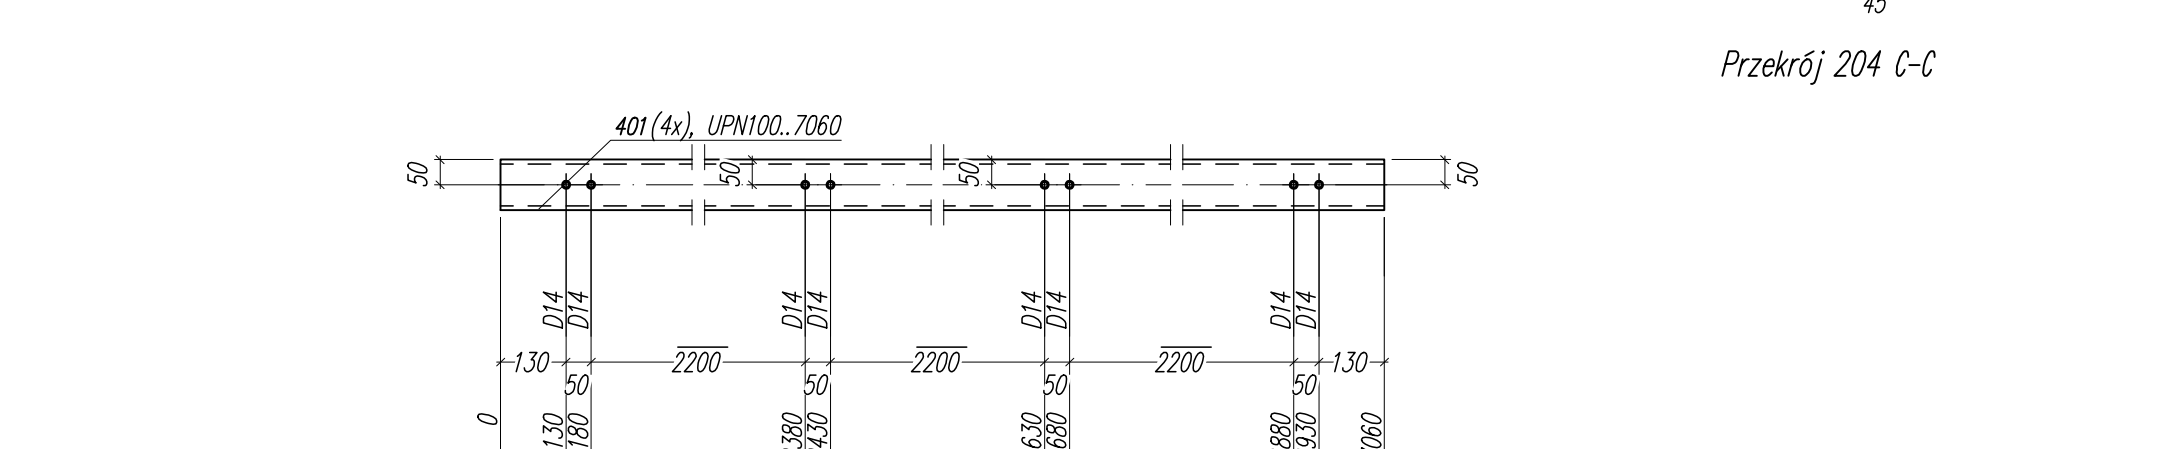



Przekrój 204 D-D

**** Zest. dla jednego et. wysyłkowego-**

Nr.	Tr.	Poz.	Nazwa	Szulk	Profil	Materiał	Długość	Waga	Ozn.
1	2	204	Odwier	1	PE220	S235JR	4871	127.61	
2	2	251	Kotłownik	2	BL100*50*5	S235JR	90	1.02	
3	2	252	BLACHA	2	PL10*135	S235JR	160	3.40	
4	2	253	BLACHA	4	PL10*134	S235JR	150	6.32	
5	2	254	BLACHA	2	FL120*12	S235JR	235	5.31	
6	2	255	BLACHA	4	PL8*50	S235JR	202	2.53	

Waga całkowita (kg) 146.20

Gabaryty (W x S x D): 335 x 198 x 4895

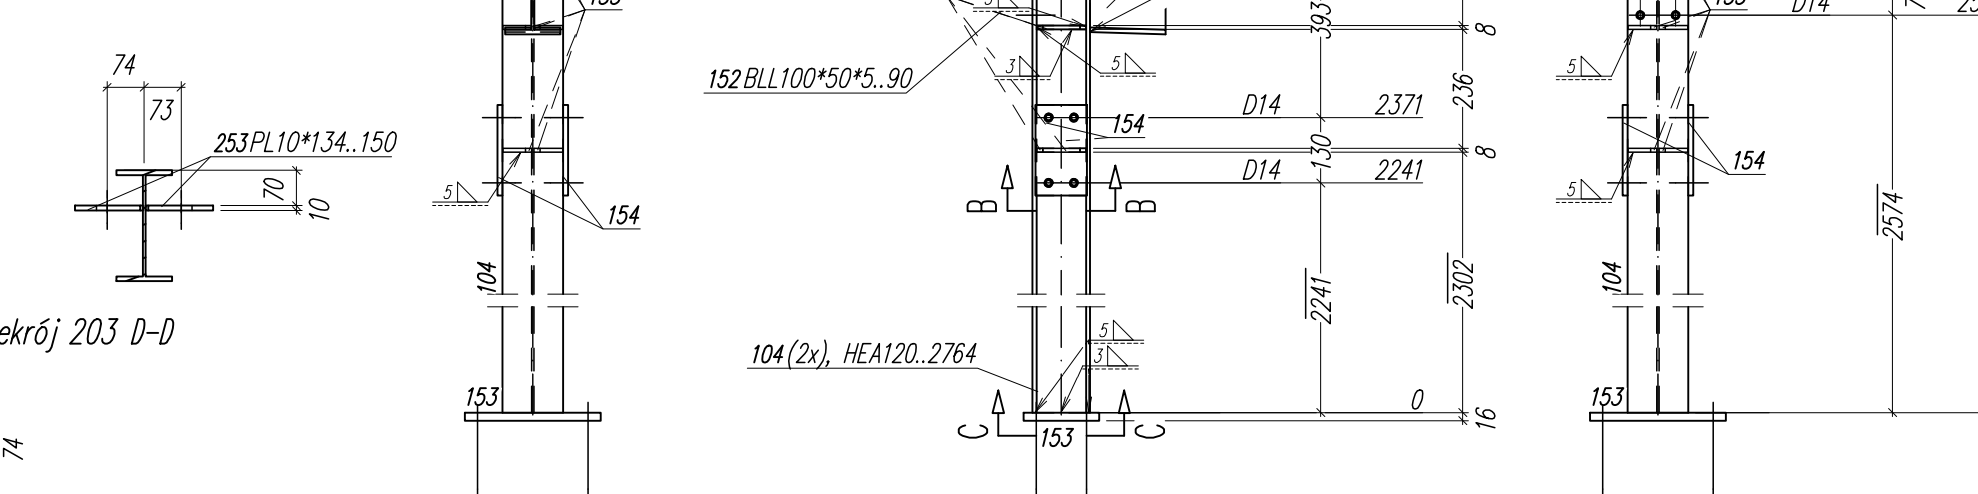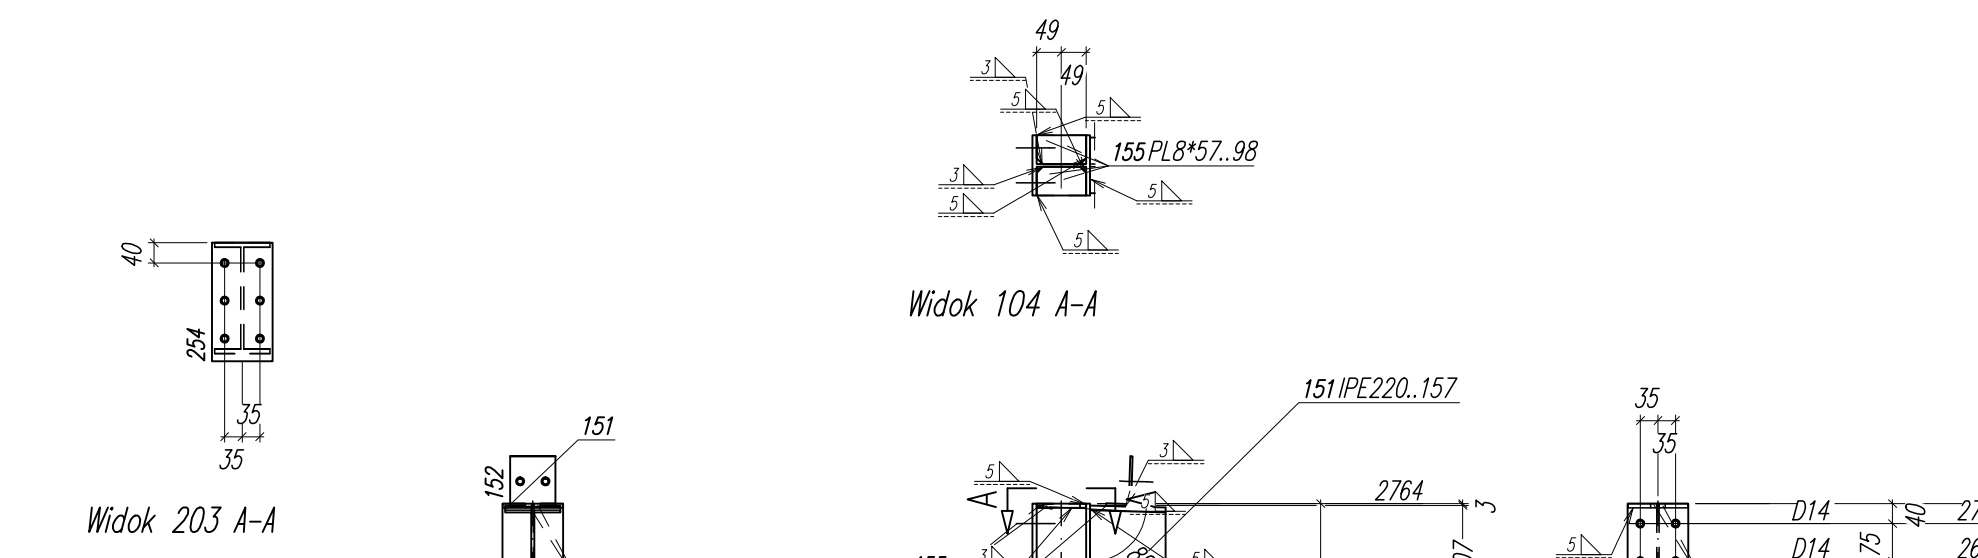



Przekrój 203 B-B

**** Zest. dla jednego et. wysyłkowego-**

Nr.	Tr.	Poz.	Nazwa	Szulk	Profil	Materiał	Długość	Waga	Ozn.
1	2	203	Odwier	1	PE220	S235JR	4871	127.61	
2	2	251	Kotłownik	2	BL100*50*5	S235JR	90	1.02	
3	2	252	BLACHA	2	PL10*135	S235JR	160	3.40	
4	2	253	BLACHA	8	PL10*134	S235JR	150	12.64	
5	2	254	BLACHA	2	FL10*12	S235JR	235	5.31	
6	2	255	BLACHA	4	PL8*50	S235JR	202	2.53	

Waga całkowita (kg) 152.52

Gabaryty (W x S x D): 335 x 275 x 4895

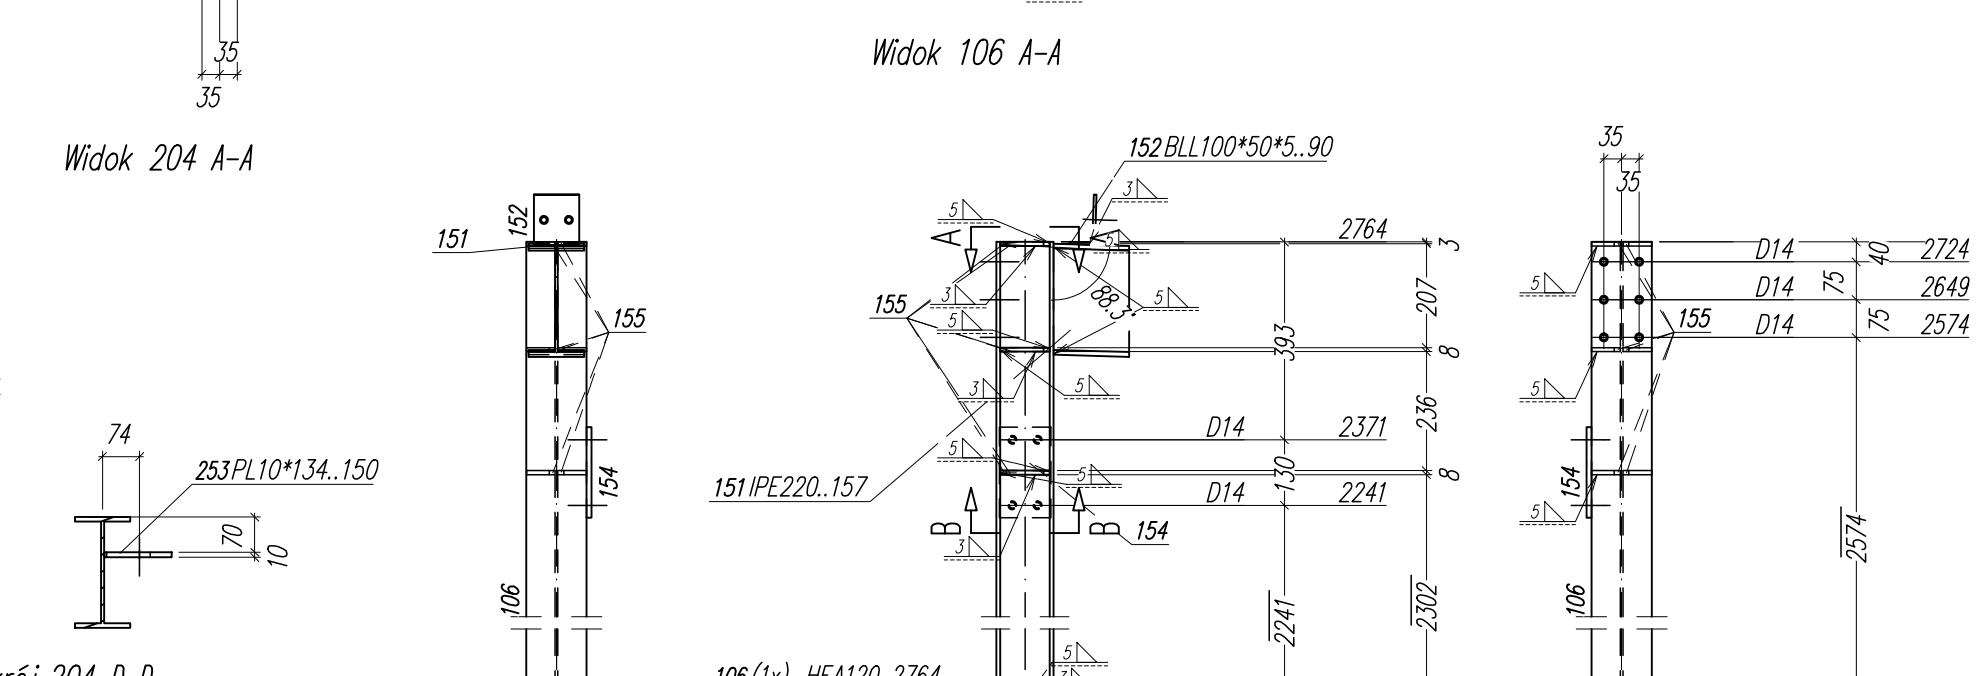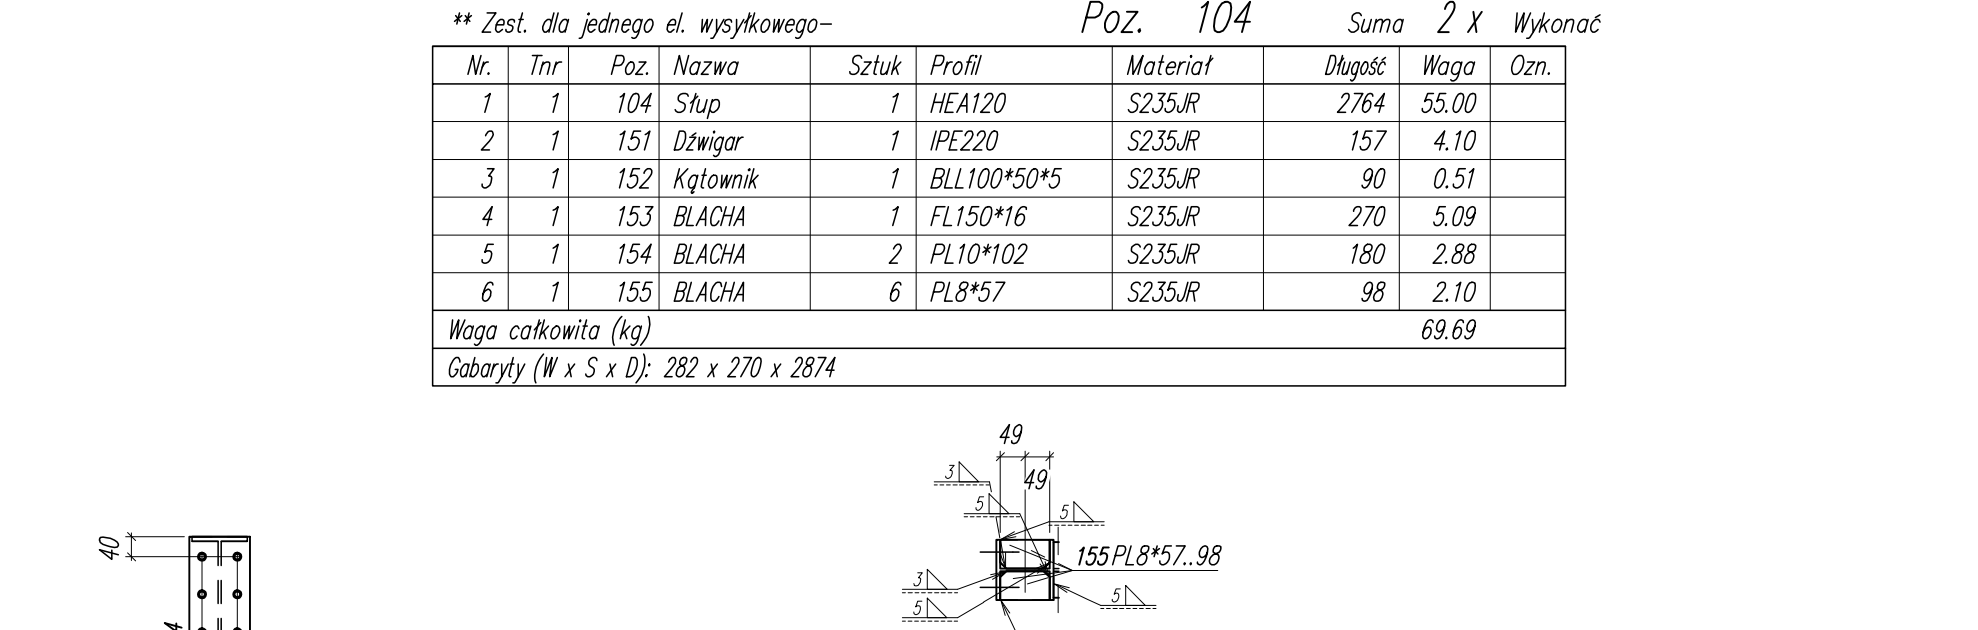



Przekrój 204 B-B

**** Zest. dla jednego et. wysyłkowego-**

Nr.	Tr.	Poz.	Nazwa	Szulk	Profil	Materiał	Długość	Waga	Ozn.
1	2	204	Odwier	1	PE220	S235JR	4871	127.61	
2	2	251	Kotłownik	2	BL100*50*5	S235JR	90	1.02	
3	2	252	BLACHA	2	PL10*135	S235JR	160	3.40	
4	2	253	BLACHA	4	PL10*134	S235JR	150	6.32	
5	2	254	BLACHA	2	FL120*12	S235JR	235	5.31	
6	2	255	BLACHA	4	PL8*50	S235JR	202	2.53	

Waga całkowita (kg) 146.20

Gabaryty (W x S x D): 335 x 198 x 4895

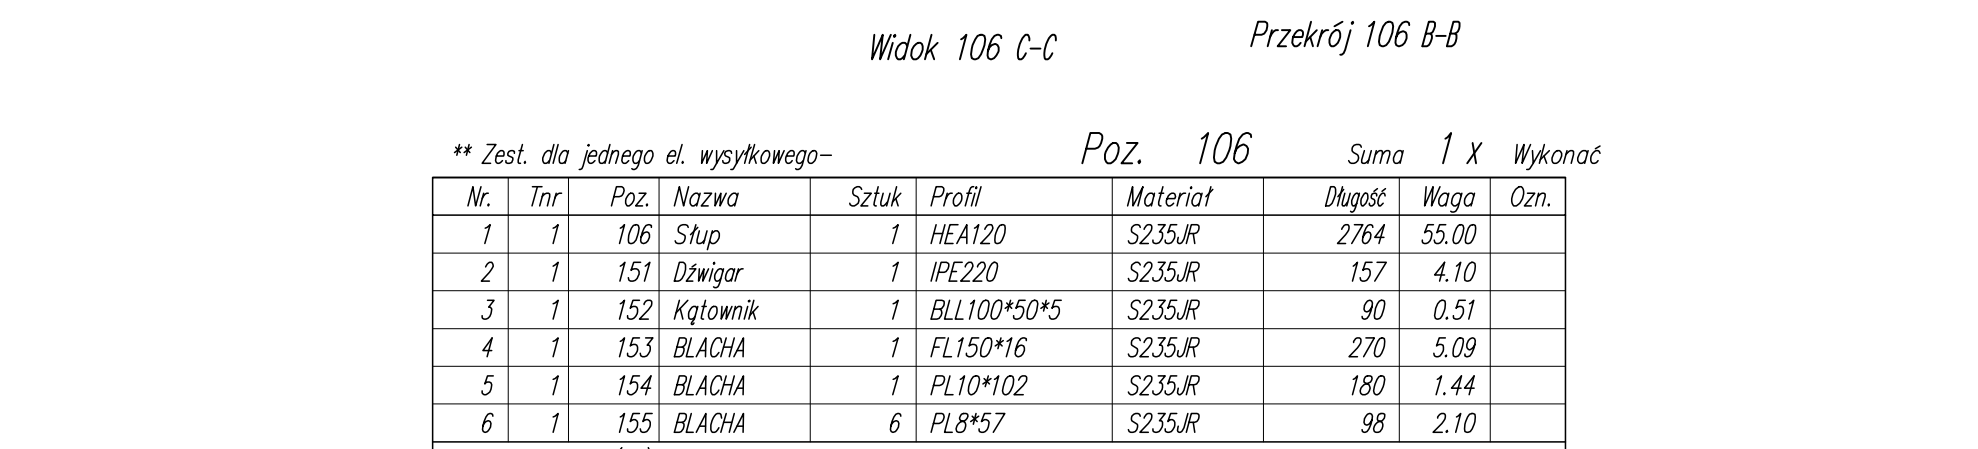



Przekrój 204 D-D

**** Zest. dla jednego et. wysyłkowego-**

Nr.	Tr.	Poz.	Nazwa	Szulk	Profil	Materiał	Długość	Waga	Ozn.
1	2	204	Odwier	1	PE220	S235JR	4871	127.61	
2	2	251	Kotłownik	2	BL100*50*5	S235JR	90	1.02	
3	2	252	BLACHA	2	PL10*135	S235JR	160	3.40	
4	2	253	BLACHA	4	PL10*134	S235JR	150	6.32	
5	2	254	BLACHA	2	FL120*12	S235JR	235	5.31	
6	2	255	BLACHA	4	PL8*50	S235JR	202	2.53	

Waga całkowita (kg) 146.20

Gabaryty (W x S x D): 335 x 198 x 4895

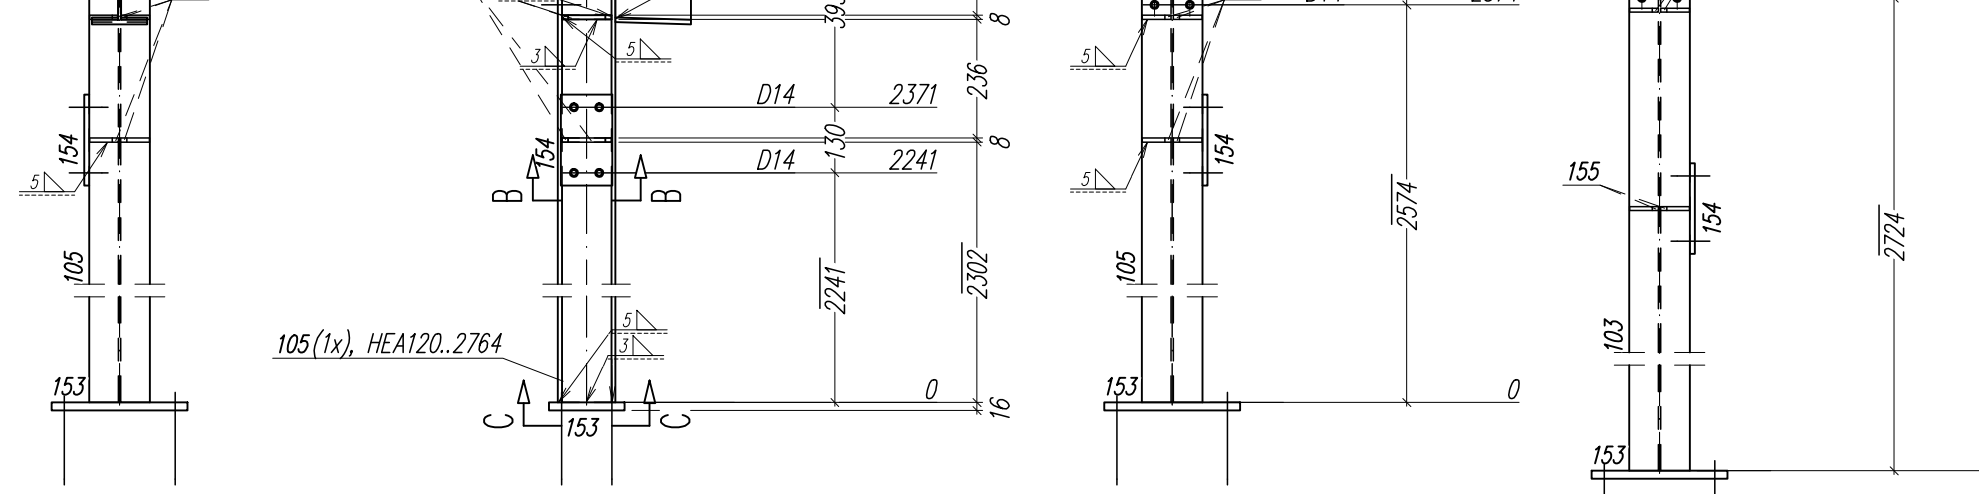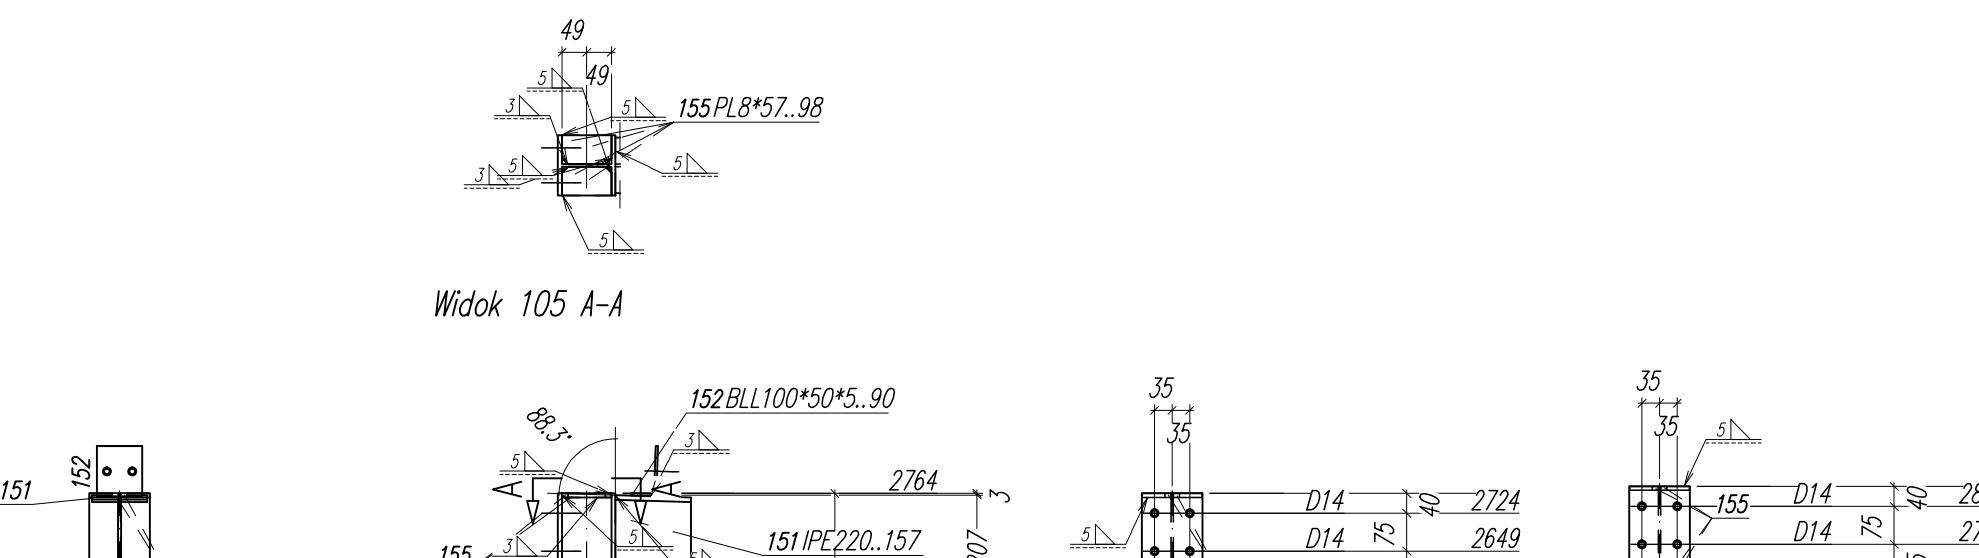



Przekrój 104 C-C

**** Zest. dla jednego et. wysyłkowego-**

Nr.	Tr.	Poz.	Nazwa	Szulk	Profil	Materiał	Długość	Waga	Ozn.
1	1	104	Slup	1	HEA120	S235JR	2764	55.00	
2	1	151	Odwier	1	PE220	S235JR	157	4.10	
3	1	152	Kotłownik	1	BL100*50*5	S235JR	90	0.51	
4	1	153	BLACHA	1	FL150*16	S235JR	270	5.09	
5	1	154	BLACHA	2	PL10*102	S235JR	180	2.88	
6	1	155	BLACHA	6	PL8*57	S235JR	98	2.10	

Waga całkowita (kg) 69.69

Gabaryty (W x S x D): 282 x 270 x 2874

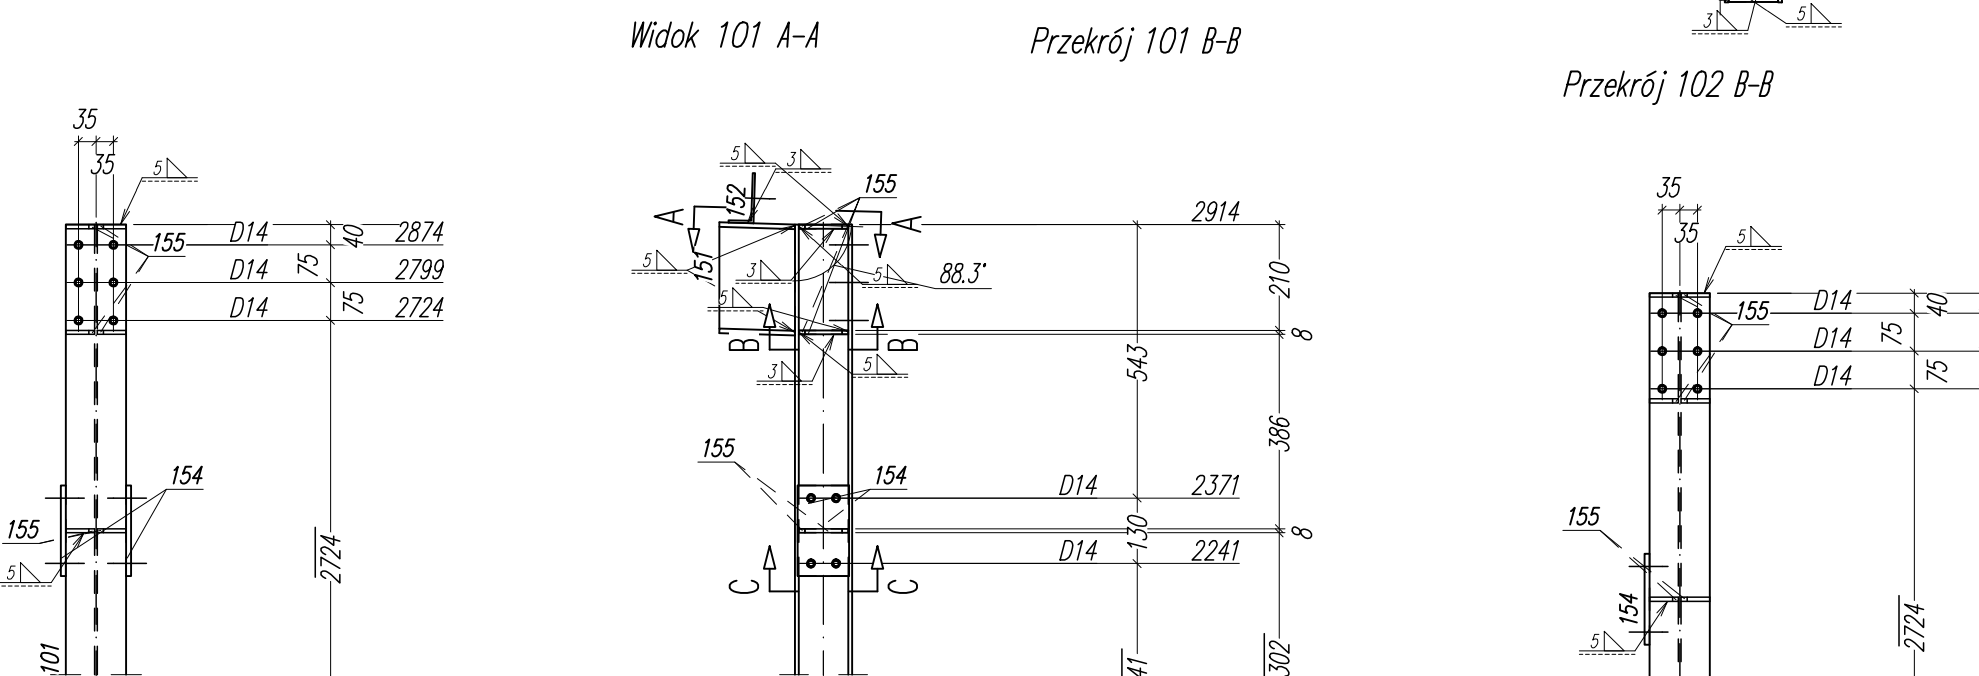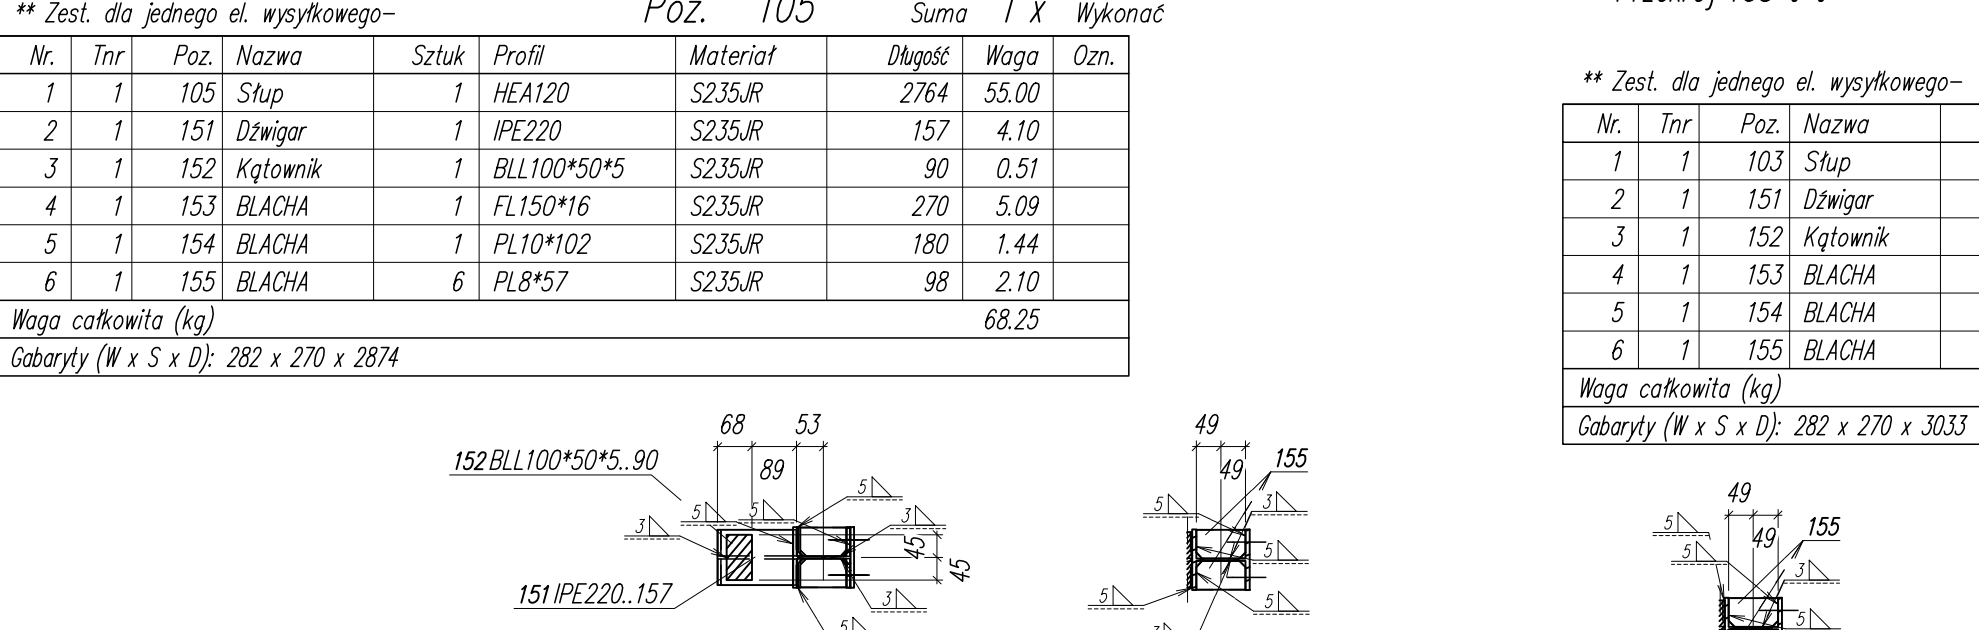



Przekrój 106 B-B

**** Zest. dla jednego et. wysyłkowego-**

Nr.	Tr.	Poz.	Nazwa	Szulk	Profil	Materiał	Długość	Waga	Ozn.
1	1	106	Slup	1	HEA120	S235JR	2764	55.00	
2	1	151	Odwier	1	PE220	S235JR	157	4.10	
3	1	152	Kotłownik	1	BL100*50*5	S235JR	90	0.51	
4	1	153	BLACHA	1	FL150*16	S235JR	270	5.09	
5	1	154	BLACHA	2	PL10*102	S235JR	180	2.88	
6	1	155	BLACHA	6	PL8*57	S235JR	98	2.10	

Waga całkowita (kg) 68.25

Gabaryty (W x S x D): 282 x 270 x 2874

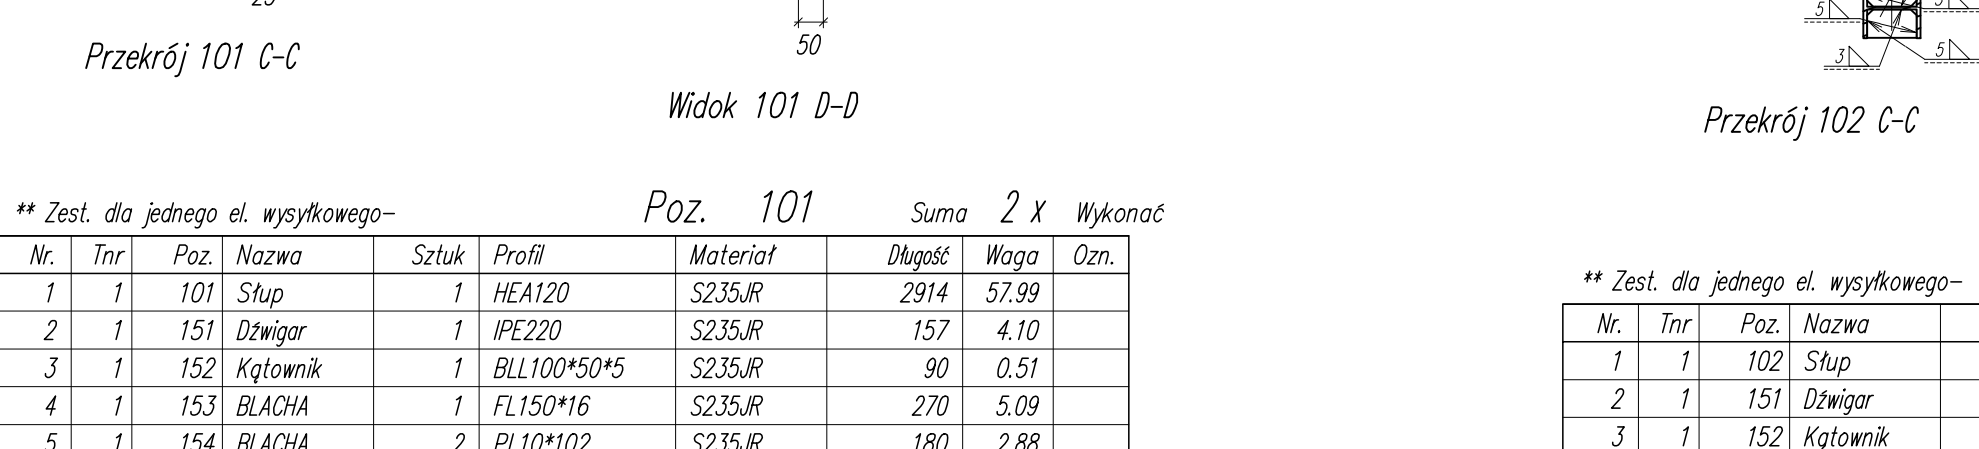



Przekrój 106 B-B

**** Zest. dla jednego et. wysyłkowego-**

Nr.	Tr.	Poz.	Nazwa	Szulk	Profil	Materiał	Długość	Waga	Ozn.
1	1	106	Slup	1	HEA120	S235JR	2764	55.00	
2	1	151	Odwier	1	PE220	S235JR	157	4.10	
3	1	152	Kotłownik	1	BL100*50*5	S235JR	90	0.51	
4	1	153	BLACHA	1	FL150*16	S235JR	270	5.09	
5	1	154	BLACHA	2	PL10*102	S235JR	180	2.88	
6	1	155	BLACHA	6	PL8*57	S235JR	98	2.10	

Waga całkowita (kg) 68.25

Gabaryty (W x S x D): 282 x 270 x 2874

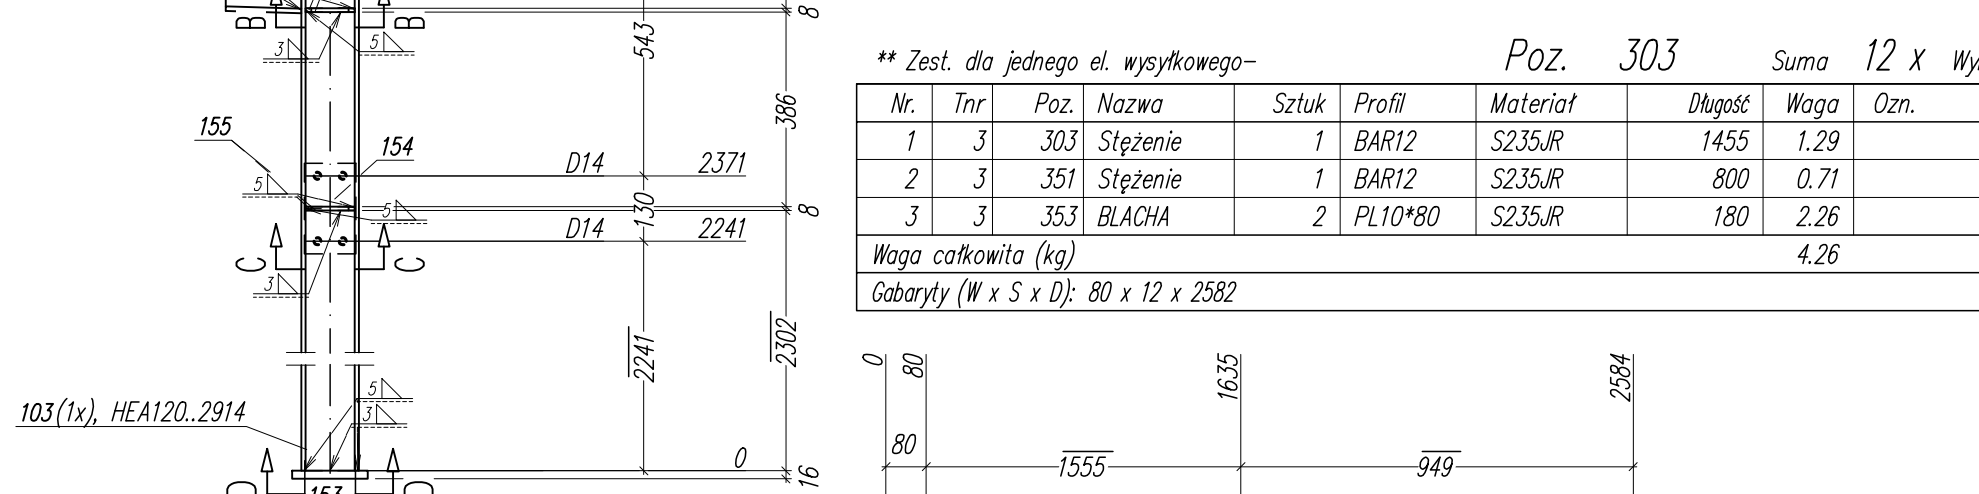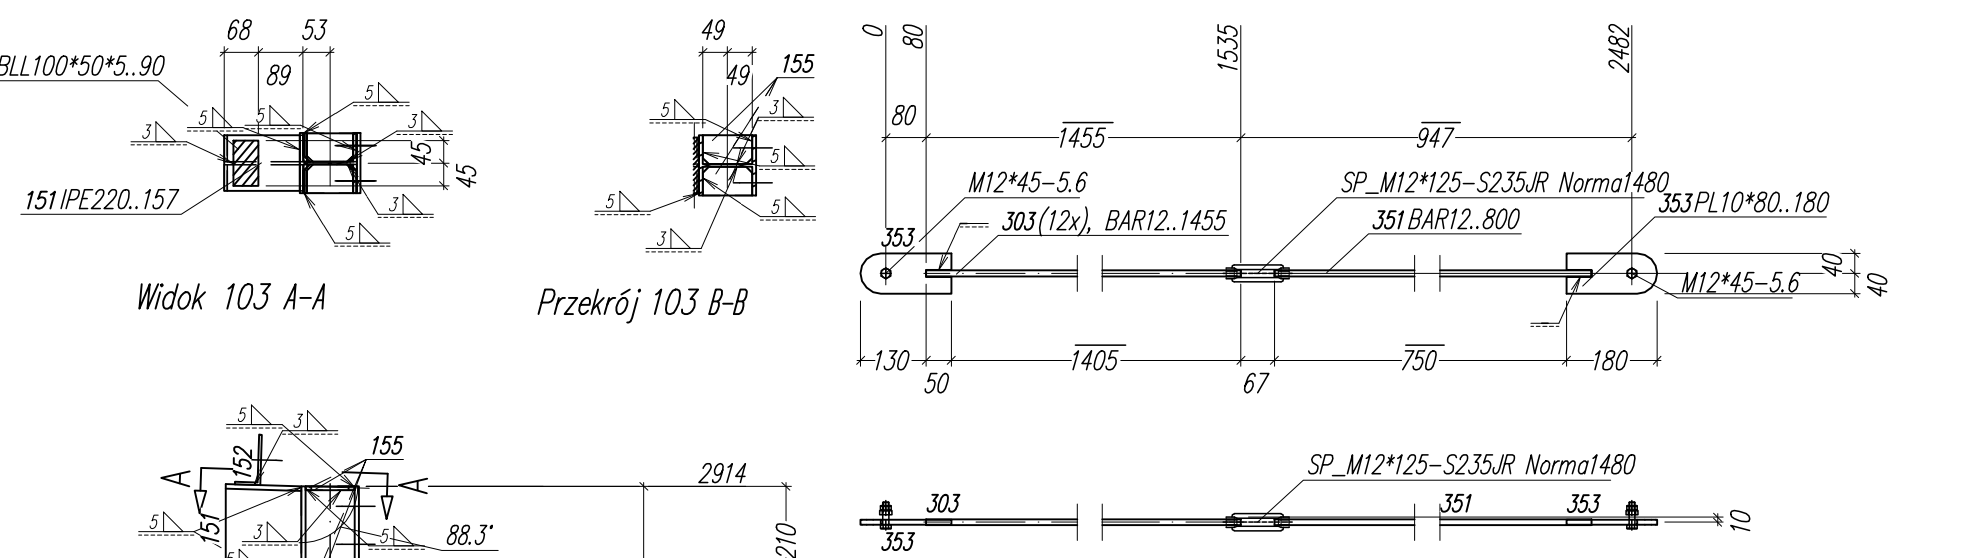



Przekrój 103 C-C

**** Zest. dla jednego et. wysyłkowego-**

Nr.	Tr.	Poz.	Nazwa	Szulk	Profil	Materiał	Długość	Waga	Ozn.
1	1	103	Slup	1	HEA120	S235JR	2914	57.99	
2	1	151	Odwier	1	PE220	S235JR	157	4.10	
3	1	152	Kotłownik	1	BL100*50*5	S235JR	90	0.51	
4	1	153	BLACHA	1	FL150*16	S235JR	270	5.09	
5	1	154	BLACHA	2	PL10*102	S235JR	180	1.44	
6	1	155	BLACHA	6	PL8*57	S235JR	98	2.10	

Waga całkowita (kg) 71.24

Gabaryty (W x S x D): 282 x 270 x 3033

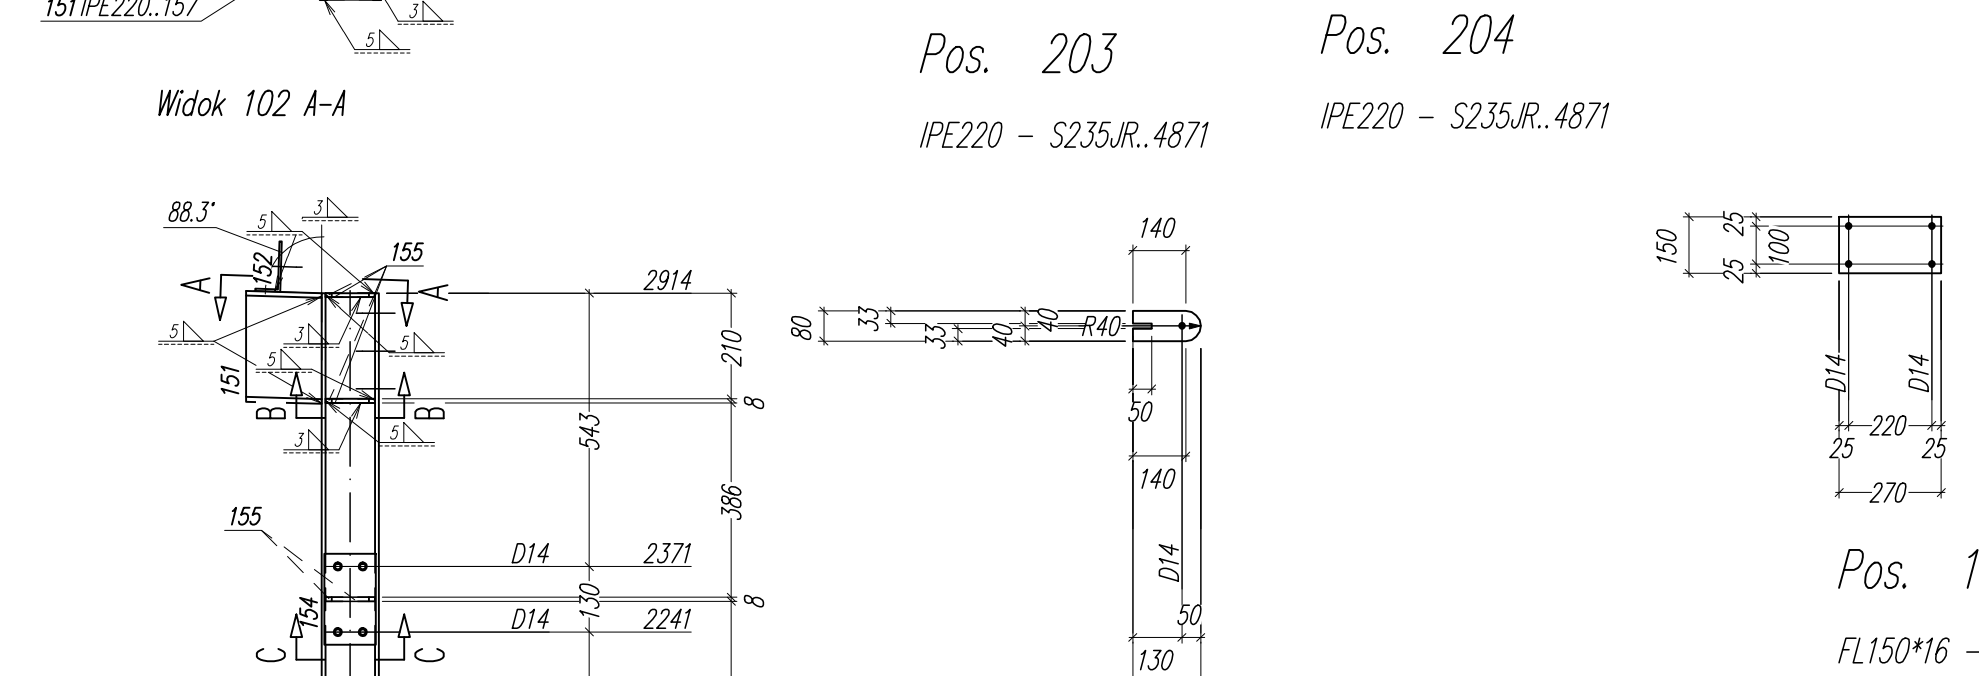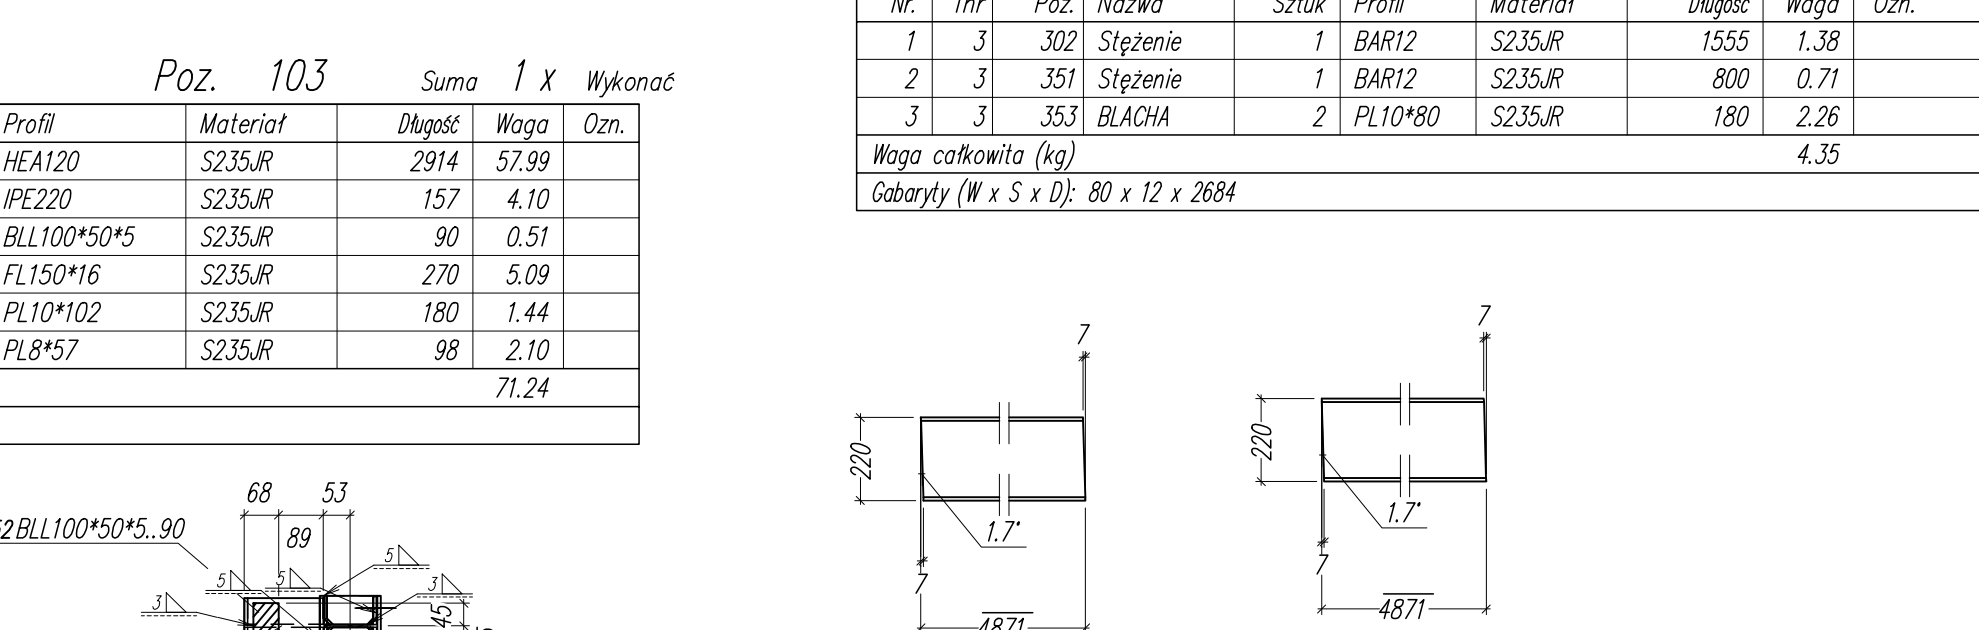


Przekrój 102 B-B

**** Zest. dla jednego et. wysyłkowego-**

Nr.	Tr.	Poz.	Nazwa	Szulk	Profil	Materiał	Długość	Waga	Ozn.
1	1	102	Slup	1	HEA120	S235JR	2914	57.99	
2	1	151	Odwier	1	PE220	S235JR	157	4.10	
3	1	152	Kotłownik	1	BL100*50*5	S235JR	90	0.51	
4	1	153	BLACHA	1	FL150*16	S235JR	270	5.09	
5	1	154	BLACHA	2	PL10*102	S235JR	180	1.44	
6	1	155	BLACHA	6	PL8*57	S235JR	98	2.10	

Waga całkowita (kg) 71.24

Gabaryty (W x S x D): 282 x 270 x 3033

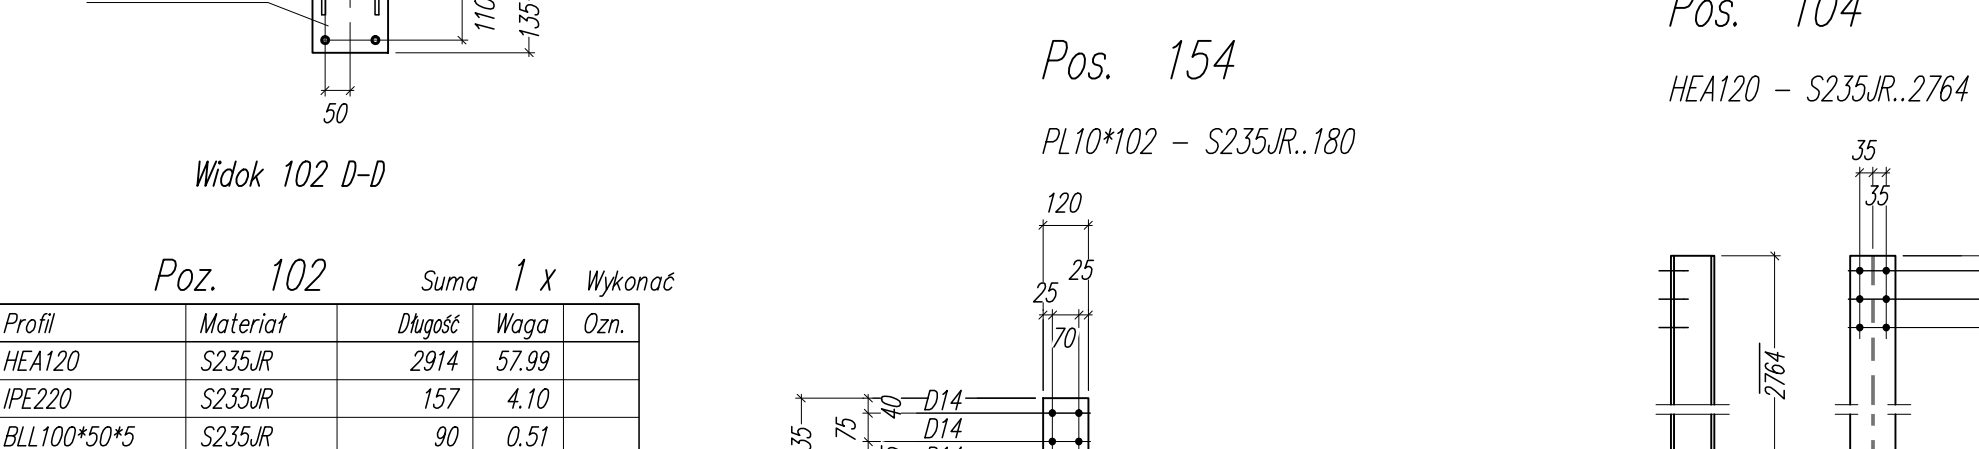



Przekrój 102 B-B

**** Zest. dla jednego et. wysyłkowego-**

Nr.	Tr.	Poz.	Nazwa	Szulk	Profil	Materiał	Długość	Waga	Ozn.
1	1	102	Slup	1	HEA120	S235JR	2914	57.99	
2	1	151	Odwier	1	PE220	S235JR	157	4.10	
3	1	152	Kotłownik	1	BL100*50*5	S235JR	90	0.51	
4	1	153	BLACHA	1	FL150*16	S235JR	270	5.09	
5	1	154	BLACHA	2	PL10*102	S235JR	180	1.44	
6	1	155	BLACHA	6	PL8*57	S235JR	98	2.10	

Waga całkowita (kg) 71.24

Gabaryty (W x S x D): 282 x 270 x 3033

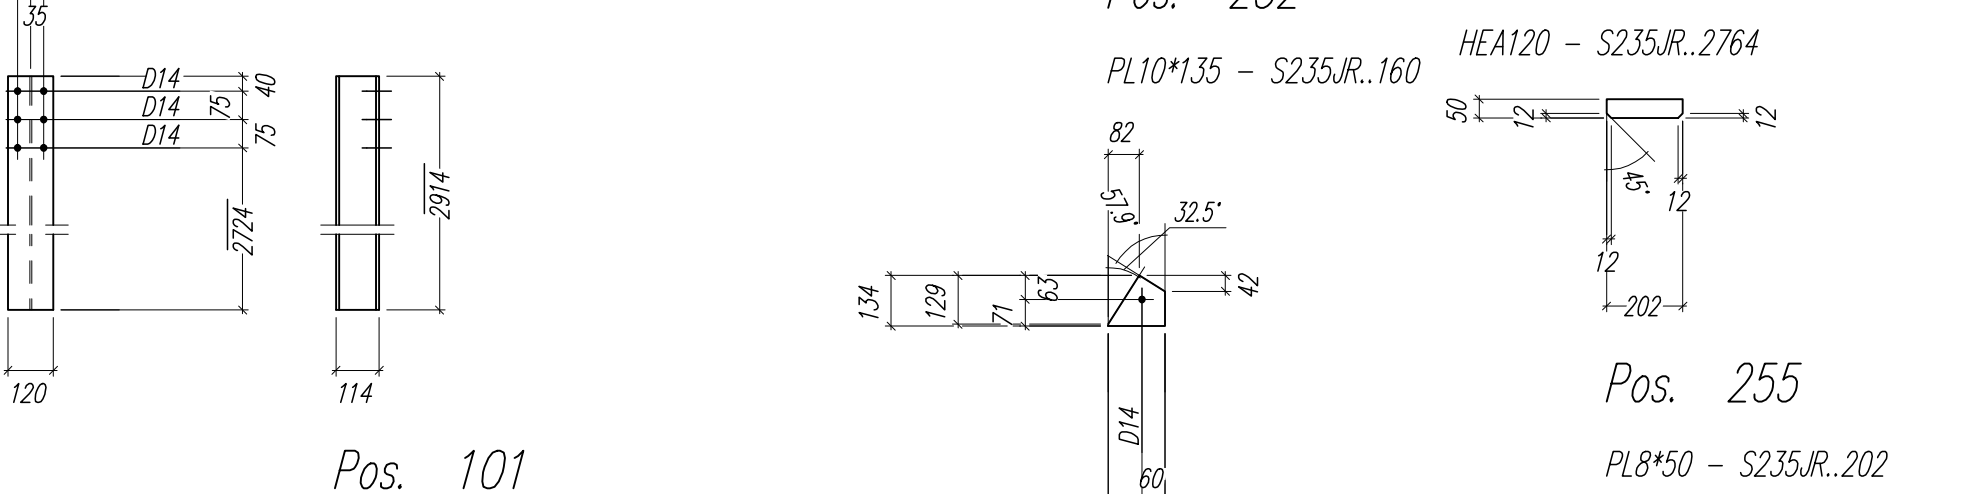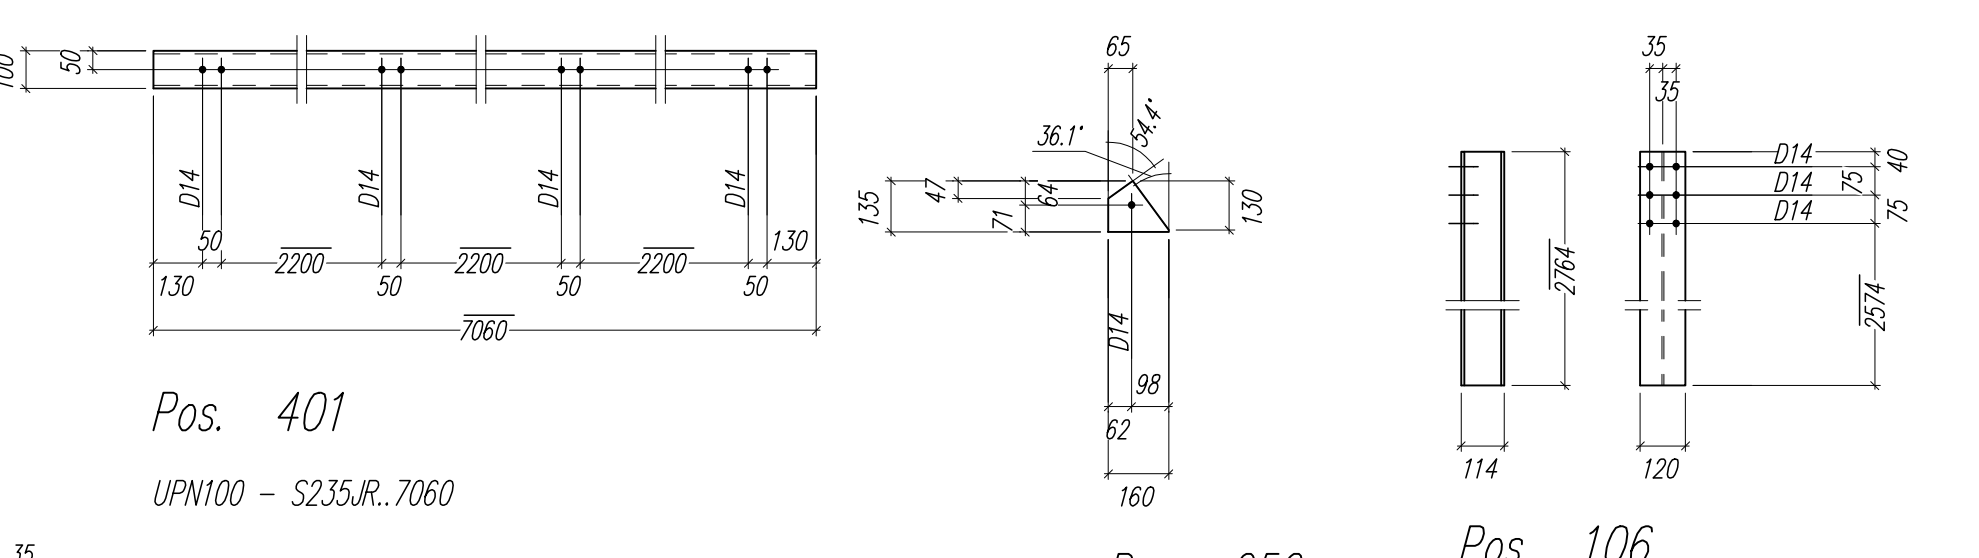



Pos. 101

**** Zest. dla jednego et. wysyłkowego-**

Nr.	Tr.	Poz.	Nazwa	Szulk	Profil	Materiał	Długość	Waga	Ozn.
1	3	302	Stępienie	1	BAR12	S235JR	1455	1.29	
2	3	351	Stępienie	1	BAR12	S235JR	800	0.71	
3	3	353	BLACHA	2	PL10*80	S235JR	180	2.26	

Waga całkowita (kg) 4.26

Gabaryty (W x S x D): 80 x 12 x 2582

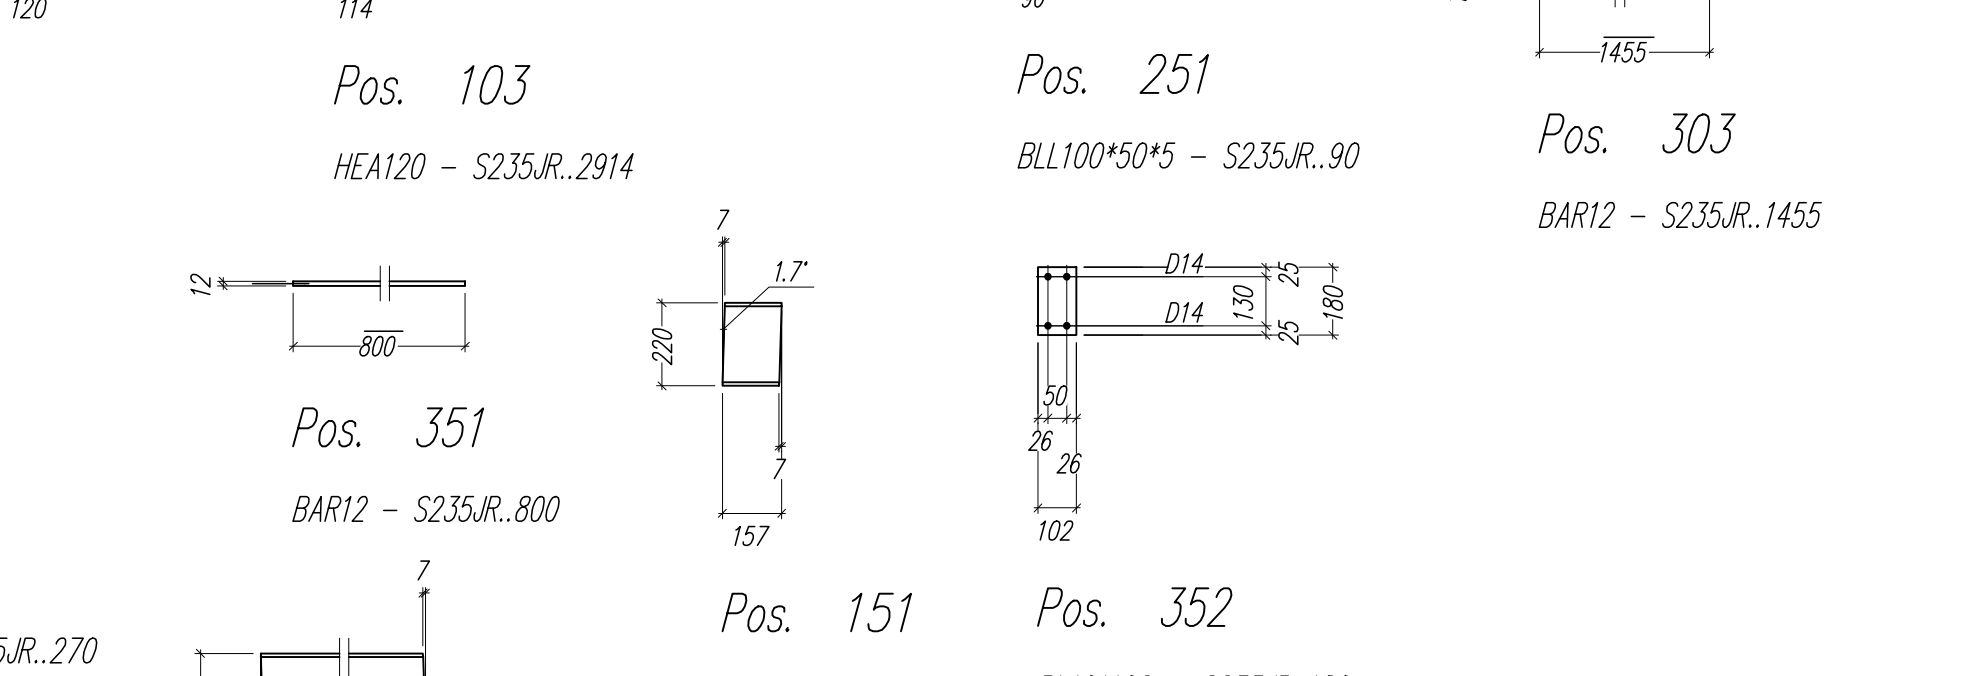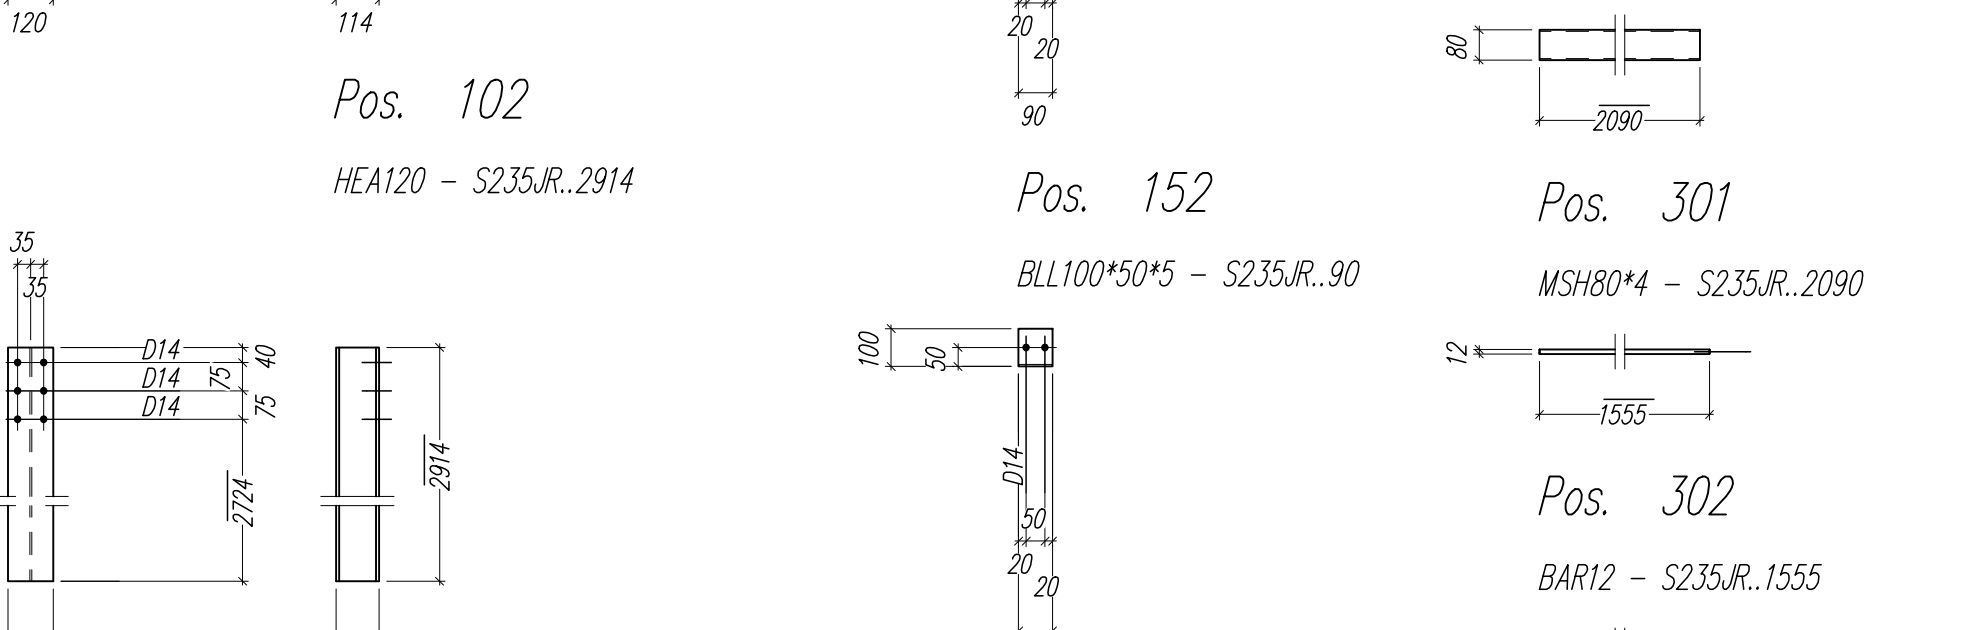

Pos. 201

IPE220 - 5235,RR,4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871

4871